

Dynamics of elastic lattices with sliding constraints

L. Cabras¹, D. Bigoni² and A. Piccolroaz²

¹Department of Industrial and Mechanical Engineering, University of Brescia, Brescia, Italy

²Department of Civil, Environmental and Mechanical Engineering, University of Trento, Trento, Italy

 LC, 0000-0002-4465-6007; DB, 0000-0001-5423-6033;
AP, 0000-0002-0537-8323

Subject Areas:

mechanics

Keywords:

metamaterials, Floquet–Bloch analysis, shear bands, ellipticity loss, material instabilities

Author for correspondence:

D. Bigoni

e-mail: bigoni@ing.unitn.it

This study investigates the impact of sliders – constraints acting on elastic rods allowing for a transverse displacement jump while maintaining axial and rotational displacement continuity – on the dynamics of a periodic elastic grid, including the effects of axial preload. The grid is linearly elastic and subject to in-plane incremental deformation, involving normal and shear forces and bending moment. The periodicity of the infinite grid permits a Floquet–Bloch wave analysis and a rigorous dynamic homogenization, leading to an equivalent prestressed elastic solid. The investigation is complemented by *ad hoc* developed F.E. simulations and perturbations with a pulsating Green’s function. Results show that the sliders create band gaps, flat bands and Dirac cones in the dispersion diagrams and generate macro-instability even for tensile prestress. The latter corresponds to the loss of ellipticity at the parabolic boundary in the equivalent elastic solid and provides a rare example of an almost unexplored form of material instability. Therefore, our results offer design strategies for metamaterials and architected materials showing reversible material instabilities and filtering properties for mechanical signals.

One contribution to a special feature ‘Asymptotic and numerical models of acoustic, thermal and elastodynamic metamaterials’ organized by Sébastien Guenneau, Agnes Maurel and Kim Pham.

1. Introduction

Slider constraints implement transverse compliance (at the same time, maintaining continuity of axial displacement and rotation) in Euler–Bernoulli or Rayleigh rods, which are otherwise unshearable. Breaking unshearability leads to strong effects on structural mechanics, for instance, introduces tensile buckling in slender rods [1]. Architected materials, designed as a

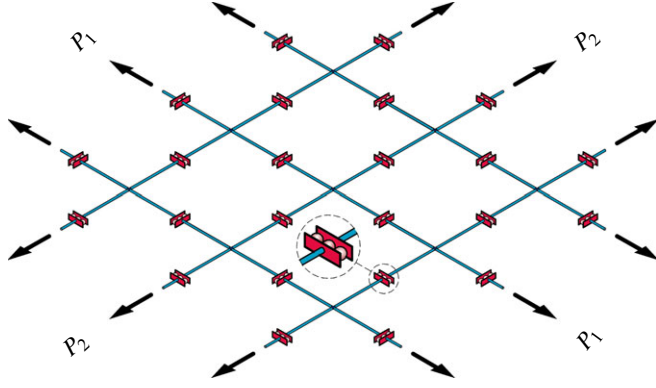


Figure 1. A grid of elastic and axially preloaded rods, jointed through sliding constraints, provides an example of a metamaterial with a bounded stability domain (thus buckling even in tension). The fact that tensile preload may be applied precludes out-of-plane instabilities, so that the material can be used for structural membranes. In dynamics, the grid shows multiple band gaps, flat bands and Dirac cones, while its equivalent homogeneous material provides an uncommon example of a material losing ellipticity at the parabolic boundary, thus evidencing ‘stress channelling’, corresponding to shear bands parallel (orthogonal) to the direction of the tensile (compressive) applied preload, P_1 and P_2 .

grid of axially preloaded elastic rods with sliders, were homogenized to obtain the response of an equivalent prestressed material [2]. The equivalent material was shown to possess a completely bounded stability domain, while unboundedness for tensile prestresses always occurs when sliders are absent [3]. Therefore, the use of sliders yields an elastic metamaterial that ‘fails’ (i.e. develops shear bands, instead of breaking bonds as in [4]) for every load path, while ‘integrity’ may be recovered by simply unloading.

Although many results have been obtained, the investigation into the mechanical effects of sliders is far from concluded, so that important effects may still have to be discovered. This article contributes in this direction by analysing the dynamics of a periodic grid of axially preloaded elastic rods, each jointed at mid-span with a slider, [figure 1](#).

Dispersion surfaces are obtained through a Bloch–Floquet wave analysis, revealing band gaps, flat bands and Dirac cones. Here, the sliders lead to the emergence of twin band gaps and localize the propagation in a direction parallel to the sliding direction when the stiffness of the sliders tends to vanish, so that a ‘floppy mode’ is introduced in the kinematics. The analysis is complemented with F.E. simulations (of a portion of grid *ad hoc* implemented with a perfectly matched layer (PML) boundary), to be contrasted with results obtained using a Green’s function perturbation technique [5], applied to an infinite body made up of the prestressed elastic material equivalent (through rigorous low-frequency, long-wavelength dynamic homogenization [6–9]) to the elastic grid. When macroscopic bifurcation occurs, corresponding to loss of ellipticity in the equivalent material [10–12], shear band formation is observed in both the lattice structure and the equivalent material. The analyses reveal that the architected material designed in this article loses ellipticity at the elliptic/parabolic boundary through the formation of shear bands aligned parallel (orthogonal) to the direction of the applied tension (compression). Materials behaving in this way were discovered by Pipkin [13], who showed that they display ‘stress channelling’. They are useful to localize signals, but are extremely rare (one example being that illustrated in [14]), so that a new design strategy towards these materials is introduced in this article. In particular, it is shown that the use of sliders permits a strong wave localization, tunable by prestress, which opens new routes to metamaterials for mechanical wave control. The fact that a tensile prestress may be applied, leading to in-plane tensile instabilities, implies that the grid analysed in this article can effectively be used in practice, because the possibility of out-of-plane buckling is ruled out.

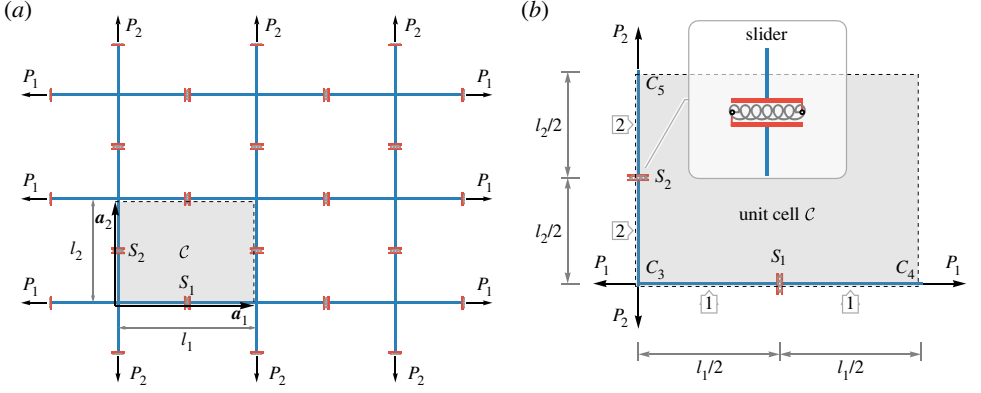


Figure 2. (a) A rectangular lattice of axially preloaded rods, endowed with sliding constraints, realizes an architected material capable of losing ellipticity under both tensile and compressive loadings. Linear springs are introduced to stiffen the sliders, thus preventing the occurrence of ‘floppy modes’. (b) The unit cell with two sliders.

2. In-plane Floquet–Bloch waves in a grid of preloaded elastic rods equipped with sliders

A two-dimensional periodic lattice of elastic rods is considered, in-plane deformable, both axially and flexurally, in which all structural members are axially preloaded from an unloaded reference configuration, figure 2. Two types of nodes connect the rods, one imposing continuity of displacement components and rotations (clamped nodes C_3 , C_4 and C_5 in the figure), while the other (slider nodes S_1 and S_2 in the figure) allows a jump in transverse displacement. The latter is linearly related to the shear force transmitted across the node, so that the constraint represents a slider equipped with a linear transverse spring. The springs inside the sliders are introduced to prevent rigid-body deformation modes (called ‘floppy’). The preload may be produced by tensile or compressive dead loading acting at infinity, while body forces in the lattice are not considered for simplicity. The preload is postulated not only to satisfy equilibrium but also to preserve periodicity and leave the structure initially free from flexure. The incremental response is analysed by considering arbitrary deformations, which include the development of bending moment and axial and shear forces.

The preloaded configuration, assumed as a reference in an updated Lagrangian description, is periodic along two linearly independent vectors $\{a_1, a_2\}$, defining the direct basis of the lattice, so that the structure can be constructed from a single unit cell C , assumed to be composed of N_B (equal to 4 in the present examples, figure 2b) elastic rods, including Rayleigh rotational inertial effects. Each rod is characterized by length l , mass density ρ , Young modulus E , cross-sectional area A and second moment of inertia I . The stiffness of the linear spring embedded inside the sliders is denoted by k_s . The equations governing the time-harmonic (in-plane) response with circular frequency ω of a grid of elastic rods were obtained in [3] and are now complemented with the slider constraints as implemented in [2]. The equations governing the time-harmonic dynamics of an elastic unshearable rod are

$$EA \frac{\partial^2 u(s)}{\partial s^2} + \rho A \omega^2 u(s) = 0 \quad \text{and} \quad EI \frac{\partial^4 v(s)}{\partial s^4} - (P - \rho I \omega^2) \frac{\partial^2 v(s)}{\partial s^2} - \rho A \omega^2 v(s) = 0, \quad (2.1)$$

where P is the axial prestress (positive when tensile). Equations (2.1) admit the solutions

$$u(s) = \sum_{j=1}^2 C_j^u e^{i\beta_j^u s} \quad \text{and} \quad v(s) = \sum_{j=1}^4 C_j^v e^{i\beta_j^v s}, \quad (2.2)$$

where $\{C_1^u, C_2^u, C_1^v, \dots, C_4^v\}$ are six arbitrary complex constants and the characteristic roots β_j^u and β_j^v are given by

$$\begin{aligned} \beta_{1,2}^u &= \pm \frac{\Omega}{l}, \quad \beta_{1,2,3,4}^v = \pm \frac{1}{l\sqrt{2}} \sqrt{-p + \Omega^2 \pm \sqrt{p^2 + (4\lambda^2 - 2p)\Omega^2 + \Omega^4}}, \\ \Omega &= \omega l \sqrt{\frac{\rho}{E}}, \quad p = \frac{Pl^2}{EI}, \quad \lambda = l \sqrt{\frac{A}{I}}, \end{aligned} \quad (2.3)$$

where p is a dimensionless measure of the prestress and λ is the slenderness of the rod. The constants appearing in equation (2.2) can be expressed as functions of the generalized (including rotations) displacements at the ends of the rod.

Reference is made to a periodic material, characterized by a unit cell, where continuity of displacement and rotation are to be imposed at all nodes joining with perfect bonding the elastic rods. At the nodes where a slider is present, the continuity conditions only involve axial displacement and rotation. In the case shown in figure 2b, internal nodes are not present and the rectangular cell is characterized by the dimensionless ratios

$$\lambda_i = l_i \sqrt{\frac{A_i}{I_i}}, \quad \kappa_i = \frac{k_{s,i} l_i^3}{EI_i}, \quad p_i = \frac{P_i l_i^2}{EI_i}, \quad \xi = \frac{l_2}{l_1}, \quad \chi = \frac{A_2}{A_1}, \quad \Omega = \omega l_1 \sqrt{\frac{\rho_1}{E}}, \quad (2.4)$$

where the index i identifies the rods aligned parallel to the horizontal, $i = 1$, and vertical, $i = 2$, directions. Moreover, the boundary nodes are subject to the Floquet–Bloch boundary conditions, based on the notion of Bloch wavevector

$$\mathbf{k} = k_1 \mathbf{e}_1 + k_2 \mathbf{e}_2, \quad (2.5)$$

so that the generalized (which include rotations) displacements $\mathbf{u}$ at point $\mathbf{x}$ satisfy

$$\mathbf{u}(\mathbf{x} + n_1 \mathbf{a}_1 + n_2 \mathbf{a}_2) = \mathbf{u}(\mathbf{x}) e^{i \mathbf{k} \cdot (n_1 \mathbf{a}_1 + n_2 \mathbf{a}_2)}, \quad (2.6)$$

where n_1 and n_2 are positive and negative integers (including 0), $\mathbf{a}_1 = l_1 \mathbf{e}_1$, and $\mathbf{a}_2 = l_2 \mathbf{e}_2$.

Enforcing the Floquet–Bloch conditions at the boundary nodes of the unit cell leads to an algebraic homogeneous linear system, which governs the wave propagation as the solution of

$$\mathbf{A}(\Omega, \mathbf{K}, \lambda_1, \lambda_2, \xi, \chi, \kappa_1, \kappa_2, p_1, p_2) \mathbf{q} = \mathbf{0}, \quad (2.7)$$

where, in the case of the structure shown in figure 2, $\mathbf{A}$ is a 11×11 complex matrix, function of the dimensionless angular frequency Ω , the dimensionless wavevector $\mathbf{K} = k_1 l_1 \mathbf{e}_1 + k_2 l_2 \mathbf{e}_2$ and parameters (2.4). The vector $\mathbf{q}$ collects the 11 degrees of freedom (displacements and rotations of the joints) of the unit cell. Specifically, the vector gathering the degrees of freedom is composed as follows:

$$\begin{aligned} u_1, v_1^{\text{Left}}, v_1^{\text{Right}}, \theta_1, & \quad \text{in the slider S1,} \\ u_2^{\text{Down}}, u_2^{\text{Up}}, v_2, \theta_2, & \quad \text{in the slider S2,} \\ u_3, v_3, \theta_3, & \quad \text{in the clamp C3.} \end{aligned} \quad (2.8)$$

Furthermore, Floquet–Bloch conditions assume the form

$$\begin{aligned} \{u_4, v_4, \theta_4\} &= \{u_3, v_3, \theta_3\} \exp(i \mathbf{k} \cdot \mathbf{a}_1), \quad \text{between nodes C4 and C3,} \\ \{u_5, v_5, \theta_5\} &= \{u_3, v_3, \theta_3\} \exp(i \mathbf{k} \cdot \mathbf{a}_2), \quad \text{between nodes C5 and C3.} \end{aligned} \quad (2.9)$$

Non-trivial solutions of system (2.7) are found when the matrix $\mathbf{A}$ is rank-deficient

$$\det \mathbf{A}(\Omega, \mathbf{K}, \lambda_1, \lambda_2, \xi, \chi, \kappa_1, \kappa_2, p_1, p_2) = 0, \quad (2.10)$$

which represents the *dispersion equation*, implicitly defining the relationship between the angular frequency Ω and the wavevector $\mathbf{K}$, the so-called *dispersion relation*. Furthermore, for each point of the $\{\Omega, \mathbf{K}\}$ -space satisfying equation (2.10), the corresponding eigenvector $\mathbf{q}(\Omega, \mathbf{K})$ can be computed from equation (2.7). Hence, the propagation of Floquet–Bloch waves is governed by the

generalized eigenvalue problem (2.7), where the *eigenfrequencies* are determined by the dispersion relation $\Omega(\mathbf{K})$, periodic with period $[0, 2\pi] \times [0, 2\pi]$, and the *eigenmodes* (or waveforms) are defined by the eigenvectors $\mathbf{q}(\Omega, \mathbf{K})$.

Dispersion surfaces are provided in the following for the Rayleigh lattices, with an emphasis on the effects of both sliders and preload. To this end, all the geometric parameters of the grid are fixed, and a square lattice, $\xi = 1$, made up of rods of equal characteristics, $\chi = 1$ and $\lambda_1 = \lambda_2 = 15$, is considered. The effect of the slider stiffnesses κ_i , assumed equal for simplicity $\kappa = \kappa_1 = \kappa_2$ and of the preload p_i is investigated. To highlight the interplay between sliders and preload, the dynamic responses of the lattice with and without preload are separately analysed.

3. Lattice without preload

(a) Dispersion properties of Bloch waves

The preload is now neglected, $p_1 = p_2 = 0$, so that only the influence of the sliders on the lattice dynamics is investigated. The stiffness of the sliders, assumed to be the same in the horizontal and vertical directions $\kappa = \kappa_1 = \kappa_2$, ranges from a low value $\kappa = 10^{-2}$ up to an extreme value $\kappa = 10^8$, for which the response of the lattice reduces to that of a perfectly jointed square lattice, in other words without sliders, analysed in [2].

Dispersion surfaces are shown in figure 3 and complemented by the band diagrams reported in figure 4, relative to the path $\Gamma-X-Y-\Gamma$ shown in the former figure. The latter figure allows the appreciation of details that would remain undetected from the dispersion surfaces. In particular, the result reported in figure 4a, pertaining to the case in which the slider stiffness is so high that the rods result fully connected (case already analysed in [2]), is used as reference. The dispersion diagrams show that, at sufficiently high slider stiffness, the presence of the sliders only affects the vibrational response of the lattice in the high-frequency regime, whereas the acoustic curves result weakly altered. Conversely, changes are limited to low frequencies Ω at small stiffness of the sliders. In this case, at low frequencies, the reduction of the slider stiffness induces a decrease in the slope of the acoustic branches. This is pronounced for the acoustic curve that characterizes the propagation of shear waves, while pressure waves are less influenced by a change in the slider stiffness. For extremely low values of κ , the slope of the acoustic curve, responsible for the propagation of the shear waves, tends to zero along the two axes K_1 and K_2 , while the dispersion surface does not touch zero everywhere, as shown in figure 3. Another peculiarity of the elastic grid is the lowering of the second and third dispersion surfaces as κ is reduced. When the slider stiffness tends to zero, the third dispersion surface touches the origin, so that now three dispersion surfaces emanate from the origin, instead of the usual two.

An infinite set of standing waves propagating at the same frequency with an arbitrary wavevector can be produced through the tuning of the stiffness of the sliders. Indeed, for a stiffness $\kappa = 10$, an almost flat surface becomes visible in figure 4d, induced by the flattening of the third dispersion surface. Another interesting effect introduced by the sliders can be noticed at high frequency, where an opening of two band gaps is observed, figure 4b.

Band gaps are not present in the absence of sliders (figure 4a), but when the slider stiffness reduces, a first band gap, around the frequency $\Omega = 3$, appears and remains almost unaltered as κ tends to zero. A second band gap, visible around $\Omega = 5$, appears, so that ‘twin band gaps’ are present. The second band gap enlarges as the slider stiffness reduces until a critical value is reached, after which this band gap begins to shrink and eventually disappears, figure 4c–f.

(b) Forced vibration

The relation between the dynamic response of a grid of Rayleigh rods and the Floquet–Bloch analysis performed in the previous section can be investigated through the analysis of the vibrations induced by a time-harmonic source (a concentrated force or moment) in a lattice of infinite extent. To this purpose, a grid of rods is numerically analysed using the Comsol

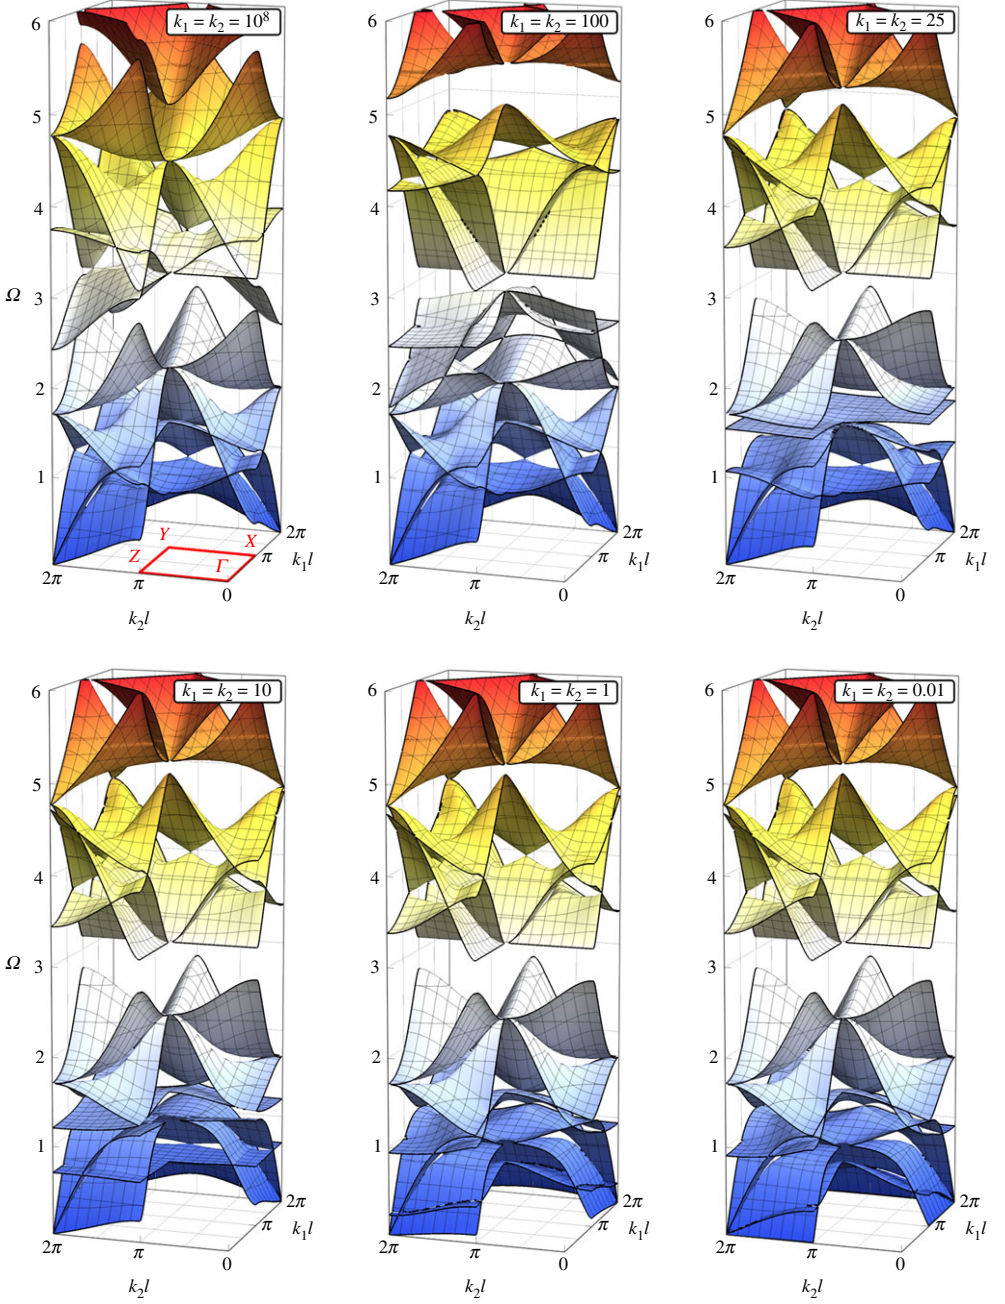


Figure 3. Dispersion surfaces of a squared grid of Rayleigh rods with slenderness $\lambda = 15$, without preload. Different values of the stiffness of the sliders are used $\kappa = 10^8, 100, 25, 10, 1, 10^{-2}$. The case $\kappa = 10^8$ is reported as a reference because the stiffness of the sliders is so high that they do not have any effect and the behaviour of the grid is the same as in the absence of sliders. The path $\Gamma-X-Y-Z-\Gamma$ reported in red represents the first Brillouin zone. In the following dispersion curves are plotted along the triangular path $\Gamma-X-Y-\Gamma$ (for the lattice without preload, which possesses square symmetry) or along the squared path $\Gamma-X-Y-Z-\Gamma$ (for the lattice with unequal preload, which possesses orthotropic symmetry).

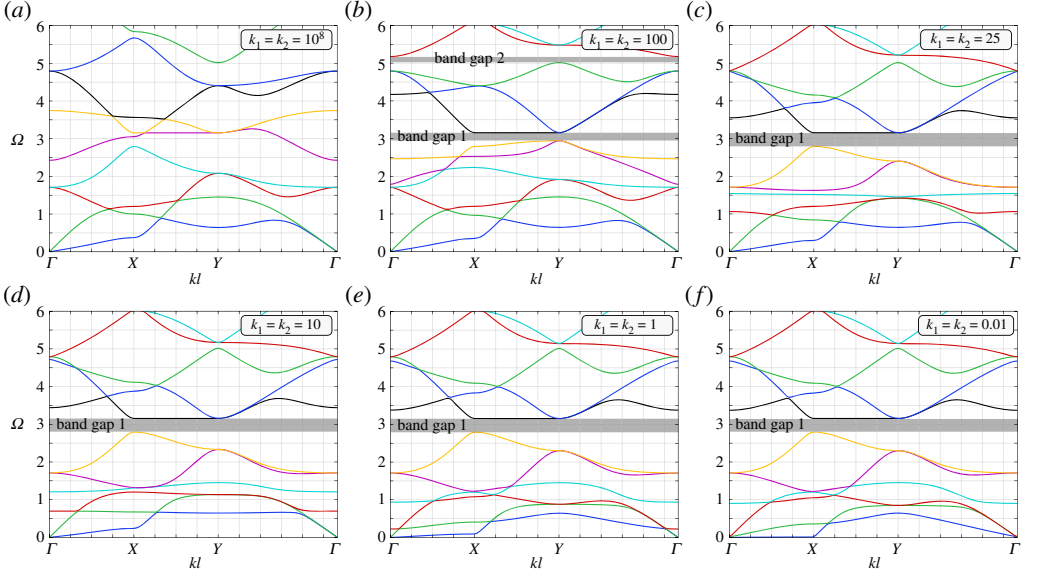


Figure 4. (a–f) Dispersion curves for a square grid of elastic rods without preload, for different values of the slider stiffness $\kappa = 10^8, 100, 25, 10, 1, 10^{-2}$. The diagrams have been evaluated along the boundary of the first irreducible Brillouin zone (path $\Gamma-X-Y-\Gamma$ sketched in figure 3). The relative band gaps are highlighted in figures b–f. ‘Twin band gaps’ are visible in panel b.

Multiphysics F.E. program in the frequency response mode. A square finite-size computational window with $(N - 1) \times (N - 1)$ unit cells is considered, where $N = 161$ is the number of nodes assumed in each direction. The window is bounded with a PML, to simulate the response of an infinite lattice. In fact, by tuning the damping in the boundary layers, the outgoing waves can be completely absorbed, so that reflection is not generated in the interior domain.

A concentrated time-harmonic source is applied (in-plane) to the central junction (C_3 in figure 2b), pulsating with a dimensionless angular frequency Ω . For a given loading and a given dimensionless angular frequency Ω , the complex displacement field, with horizontal and vertical components

$$u = u_R + iu_I \quad \text{and} \quad v = v_R + iv_I, \quad (3.1)$$

is computed. The results are plotted in terms of the displacement amplitude associated with the real parts,

$$\delta_R(x, y, \Omega) = \sqrt{u_R^2 + v_R^2}, \quad (3.2)$$

while the displacement amplitude associated with the imaginary parts,

$$\delta_I(x, y, \Omega) = \sqrt{u_I^2 + v_I^2}, \quad (3.3)$$

is omitted for conciseness.

(i) Low-frequency regime

The elastic grid is forced by a horizontal force, pulsating at the low angular frequency $\Omega = 0.05$. Results in terms of displacement amplitude δ_R are reported in figure 5, where different values of the slider stiffness κ are investigated.

At these frequencies, two dispersion surfaces are always intersected. In the long-wavelength regime, at a very low value of the slider stiffness, $\kappa = 10^{-2}$ (figure 5c), the dynamic response exhibits a strong localization along the directions of the applied load, because the compliance of the sliders does not allow the propagation of waves through the adjacent (horizontal) rows of rods. In other words, the horizontal wave localization can be viewed in terms of the response of

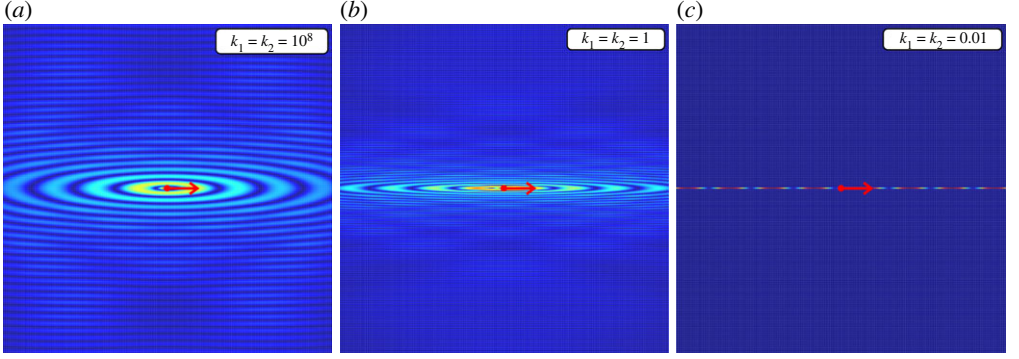


Figure 5. (a–c) Maps of displacement amplitude (obtained through F.E. analyses) for different stiffness of the sliders $\kappa = \{10^8, 1, 10^{-2}\}$ of a grid of Rayleigh rods (without preload). The latter is excited by a time-harmonic concentrated force (aligned parallel to the horizontal direction) vibrating at low frequency, $\Omega = 0.05$. When the slider stiffness becomes vanishing small a strong localization of the signal is observed, visible on the right.

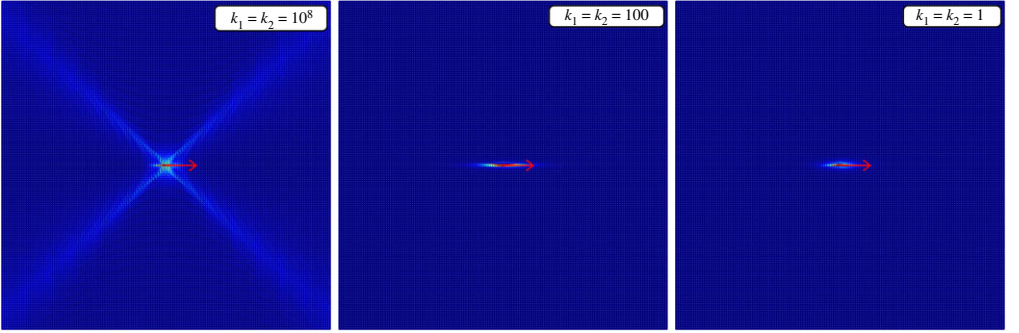


Figure 6. As for figure 5, except that the frequency $\Omega = 3.0$ is investigated for $\kappa = \{10^8, 100, 1\}$. The selected frequency falls within the low-frequency band gap of figure 4 for $\kappa = 100$ and 1, so propagation is here suppressed.

the elastic material equivalent to the grid which loses ellipticity when the stiffness of the sliders is approaching zero.

This transmission becomes possible when the slider stiffness is increased, so that shear waves are allowed to propagate throughout the whole lattice, figure 5b. At the highest value of slider stiffness, the rods are perfectly joined, so that the response of a square lattice without sliders is obtained, figure 5a. The growth of the wavelength with the increase of the slider stiffness can be deduced from the dispersion curves reported in figure 4, where high values of the slider stiffness increase the slope of the acoustic curve, responsible for shear wave propagation. Therefore, the modulus of the wavevector $\mathbf{K}$ reduces, and consequently, wavefronts are more distant.

(ii) Band gaps

An analysis of the dispersion curves in figure 4 reveals that twin band gaps are present in the range of analysed frequencies. The first band gap, at low frequency, is not present when the rods result perfectly joined ($\kappa = 10^8$), but it appears when the stiffness of the sliders is reduced, $\kappa = 100$ and 1. The response of the lattice is shown in figure 6 at the frequency $\Omega = 3$ and in figure 7 at the frequency $\Omega = 5.1$. The former frequency is internal to the band gap at low frequency for $\kappa = \{100, 1\}$, while the latter is internal to the band gap at high frequency, for $\kappa = 100$. The perfectly joined rod case is also reported for comparison, $\kappa = 10^8$, where no band gap is present. The figure shows that the behaviour of the forced lattice confirms the dynamic response predicted by the dispersion curves.

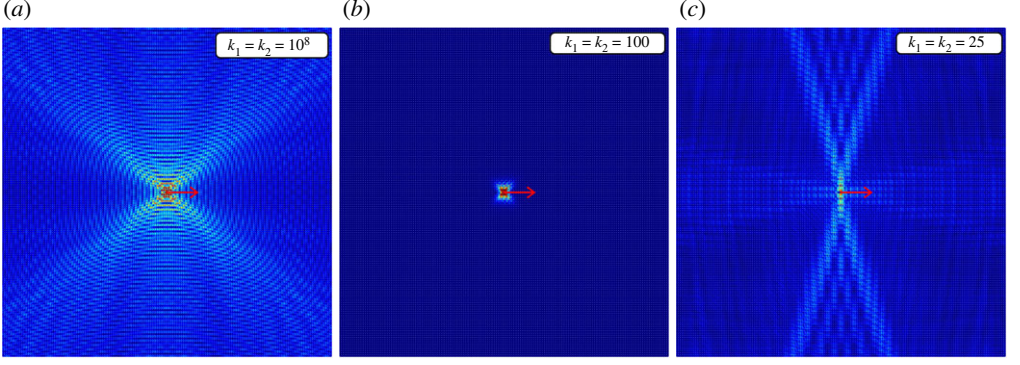


Figure 7. (a–c) As for figure 6, except that the vibration frequency, $\Omega = 5.1$, is internal to the high-frequency band gap visible in figure 4 at $\kappa = 100$. Here propagation is suppressed. Decreasing the stiffness of the sliders to $\kappa = 25$, the high-frequency-band gap closes and propagation is again possible.

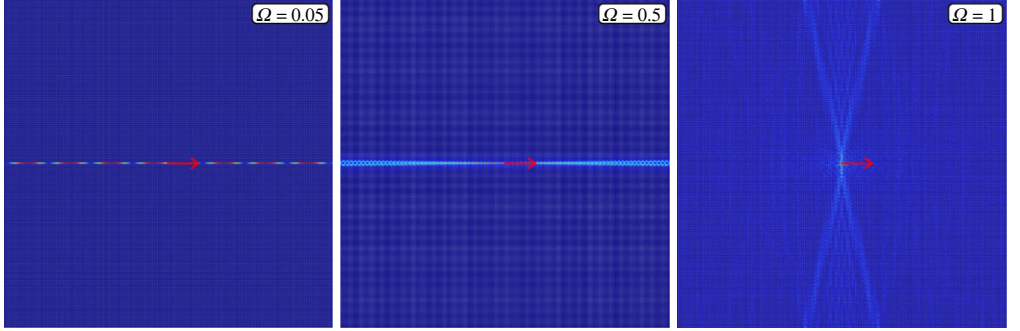


Figure 8. Vibrations of a ‘quasi-overdetermined’ grid of Rayleigh rods, characterized by a low slider stiffness $\kappa_1 = \kappa_2 = 0.01$, in the absence of preload and excited by a time-harmonic horizontal force pulsating at different frequencies. The displacement field is strongly localized at low frequencies $\Omega = 0.05$ and 0.5 , as the effect of the low compliance of the sliders, while at high frequency, $\Omega = 1$, the wave spreads to the entire lattice.

Differently from the first band gap, the latter is present for a limited interval of values of the slider stiffness. The band gap vanishes for $\kappa = 25$, as visible in figure 7c.

(iii) ‘Quasi-overdetermined’ lattice

In the limit, when the slider stiffness vanishes, the grid is susceptible to non-trivial rigid-body motions (translations aligned parallel to the sliders), so that the system of equations governing the statics of the grid becomes overdetermined. The analysis of a case near this limit, in which the slider stiffness is very low, $\kappa = 0.01$, is interesting. It will be referred to as ‘quasi-overdetermined’ and can be viewed as a loss of ellipticity at vanishing slider stiffness of the equivalent elastic material obtained through homogenization.

When their stiffness becomes low, sliders can transmit with difficulty a signal when the lattice is forced in a direction aligned parallel to them, as confirmed in figure 8 for $\Omega = 0.05$ and 0.5 , where the propagation is highly localized. This is typical of the low-frequency regime, close to the origin $\Omega = 0$. Differently, at sufficiently high frequency, $\Omega = 1$, the propagation of a signal is not excluded, as foreseen by the dispersion curves. The situation is also illustrated in figure 9, which reports details of figure 8 (so magnified that the grid of rods becomes visible) cut near the point of application of the pulsatile force.

Figure 9 shows the influence of the inertia on the dynamic response of the lattice. A horizontal translation of the row where the load is applied and of the connected vertical rods is visible for

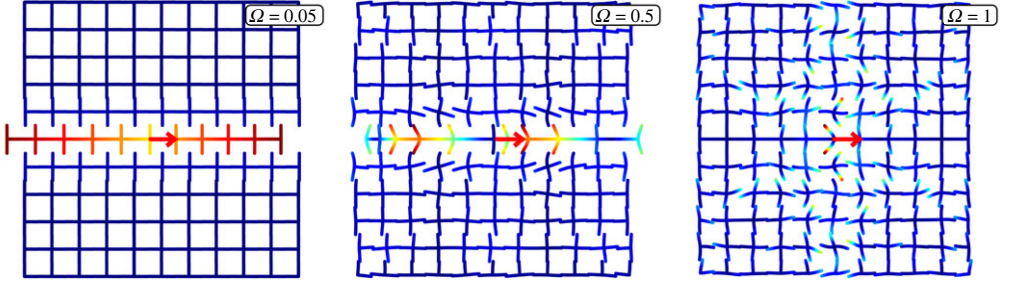


Figure 9. Details of figure 8 showing localization of the vibrational displacement, in the proximity of the row where the load is applied at $\Omega = 0.05$ and 0.5 , while at high frequency $\Omega = 1$, waves spread through the ‘quasi-overdetermined’ grid of rods, characterized by small slider stiffness $\kappa_1 = \kappa_2 = 0.01$.

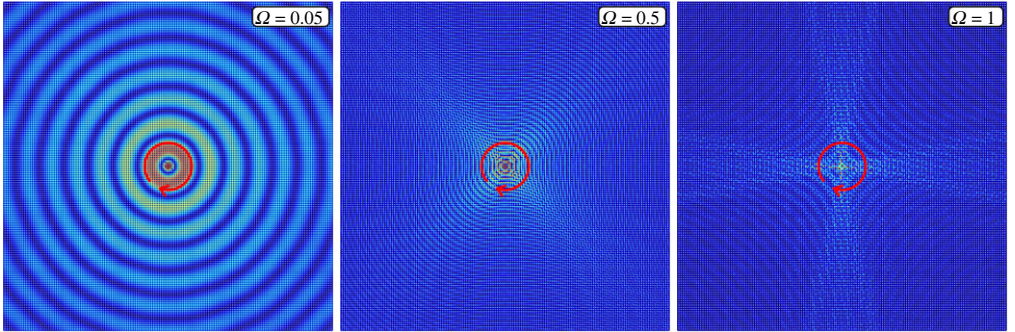


Figure 10. A concentrated moment applied at the centre of a ‘quasi-overdetermined’ grid, $\kappa_1 = \kappa_2 = 0.01$, (without preload) leads to propagation in the whole lattice at all frequencies. The effects of an applied pulsatile moment contrast with those related to the application of a pulsatile force, see figure 8. In fact, now waves propagate in every direction.

$\Omega = 0.05$, where bending is negligible, so that the rotation transmitted by the sliders is small. Consequently, the signal is strongly localized. Increasing the frequency to $\Omega = 0.5$ and $\Omega = 1$, the inertia of the rods induces their bending, so the rotation of the sliders propagates the signal in the whole grid.

The response of the grid to a concentrated moment (applied at the central node of the grid) is investigated in figure 10. In this case, bending of the rods is induced at all frequencies, even low ones, so that a circular pattern is observed. This pattern is present until $\Omega = 0.5$ is reached, while at higher frequencies the propagation of the signal changes, so that it becomes oriented almost parallel to the axes of the grid. The behaviour of the grid under an applied moment is in stark contrast with the applied force (figures 8 and 9) because the moment excites waves propagating in every direction.

4. Preloaded lattice: dispersion properties, forced vibration and ‘macro’ bifurcation

The investigation of the stability of the grid includes the preload of the rods. Lattice bifurcations can exhibit deformation modes in the grid of rods with various wavelengths, and they are controlled by the value of the preload state. A ‘global’ or ‘macro’ bifurcation occurs in the limit of infinite wavelength; otherwise, the bifurcation is referred to as ‘microscopic’. Only the macro (or global) instability can be associated with the failure of ellipticity of the equivalent elastic prestressed solid, which involves the appearance of an abrupt localization of the deformation

within the lattice. The latter is known as ‘shear band mode’ and represents in the lattice the analogue of a jump in the incremental strain in the equivalent solid. It is important to note how the tunability of the slider stiffness and preload enables the characteristics of the grid to control the occurrence of shear bands.

The analyses that follow are complemented by the relations between the grid and its homogenized response in terms of an elastic equivalent continuum. The homogenization scheme was derived in [2,3] and is not repeated here. It was shown in [2] that the incremental response of the preloaded grid of elastic rods can be homogenized to become the incremental response of a prestressed elastic solid.

The preload of components p_1 and p_2 is transformed into a Cauchy prestress of components T_{11} and T_{22} ,

$$T_{11} = \frac{p_1}{l_2} = \frac{EA_1}{l_1} \frac{p_1}{\lambda_1^2 \xi} \quad \text{and} \quad T_{22} = \frac{p_2}{l_1} = \frac{EA_1}{l_1} \frac{p_2 \chi}{\lambda_2^2}, \quad (4.1)$$

affecting the response of an equivalent elastic material defined by a fourth-order tensor, function of the slider stiffness, the grid stiffness and its geometry.

A macro bifurcation in the grid corresponds to a loss of ellipticity in the continuum, while micro bifurcations leave the equivalent solid unaffected. When the stability domain of the grid does not include micro bifurcations, the correspondence between the grid and the equivalent continuum becomes perfect.

Failure of ellipticity occurs in a solid when the speed of an acceleration wave vanishes, a condition represented by an eigenvalue of the acoustic tensor becoming null. The direction $\mathbf{n}_E$ for which the acoustic tensor (reported in appendix A for the case under study) becomes singular, and the respective eigenvector $\mathbf{g}_E$ represents the normal to the shear band and the shear deformation mode, respectively.

In the following, two case studies are provided: uniaxial preload in the horizontal direction $p_2 = 0$ and equibiaxial preload, $p_1 = p_2$.

(a) Uniaxial preload $p_2 = 0$

The lattice is subject to an uniaxial preload defined by the axial forces acting in the horizontal direction ($p_2 = 0$).

The stability domain inside which global bifurcations do not occur is obtained in the p_1 - p_2 space as shown in [2]. The grid and the preload satisfy orthotropy and in the case under analysis orthotropy reduces to cubic symmetry when the grid is unloaded. Therefore, the stability domain is symmetric with respect to the equibiaxial loading axis, $p_1 = p_2$ (analysed in the next subsection).

Macro bifurcations, corresponding to the formation of shear band modes, appear on the boundary of the domain, aligned parallel (orthogonal) to the loading direction for tension (for compression). Owing to the presence of the sliders, the stability domain of the lattice is bounded both in compression and in tension and tends to become unbounded in tension when the stiffness of the sliders increases.

For three distinct values of slider stiffness κ , the preload component p_1 , which causes a macro bifurcation, is listed in table 1, with p_{1E}^- and p_{1E}^+ denoting the negative and positive critical preloads, respectively.

The dynamic response of the structure depends on both the stiffness of the sliders and the preload, the effect of the latter will be analysed in the following to assess the stability of the structure assuming for brevity $\kappa = 100$. Under this assumption and for three different values of preload p_1 , including for comparison the case of null preload, the dispersion curves are shown in figure 11, relative to the path $\Gamma - X - Y - Z - \Gamma$ reported in figure 3.

The grid reaches a macro bifurcation in tension, on the right of the figure, and in compression, on the left, as predicted in table 1. When the preload achieves a critical negative or positive value (in compression or in tension), one of the acoustic surfaces exhibits a null tangent at the origin of the reciprocal space, denoting propagation of waves with infinite wavelength, that identifies a macro instability. It is interesting to note that the alteration in dispersion curve shapes is less

Table 1. Macro bifurcation occurring in the elastic grid for different slider stiffness κ . Uniaxial preload of the rods is assumed, $p_2 = 0$. The occurrence of macro bifurcation in the grid coincides with the loss of ellipticity in the equivalent continuum, where preload becomes equivalent to prestress.

critical values of uniaxial preload $p_2 = 0$ for macro bifurcation		
slider stiffness κ	compressive critical prestress p_{1E}^-	tensile critical prestress p_{1E}^+
1	-0.538088	0.929147
10	-2.66810	6.65908
100	-5.01017	34.06669

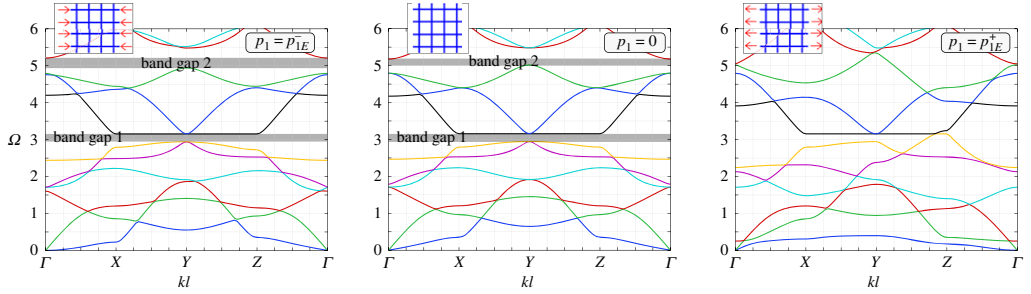


Figure 11. Evolution of the dispersion curves with uniaxial preload ($p_2 = 0$). The slider stiffness is assumed equal to $\kappa = 100$. The curves on the left correspond to the compressive critical preload in table 1, the ones in the centre correspond to the grid without preload, and the curves on the right to the grid with tensile critical preload in table 1.

pronounced when the lattice experiences preloading in compression compared with preloading in tension. In particular, it is possible to notice that twin band gaps persist in compression, while these disappear in tension.

The dispersion surfaces (a-c) and the relative slowness contours (d-f) at low angular frequency, $\Omega = 0.01$, are reported in figure 12 for a grid without preload (b,e) and for a preload level close to the macro instability in compression (a,d) and in tension (c,f).

Infinite-wavelength bifurcations occur at the vanishing slope of the acoustic branches at the origin of the space $\{\Omega, K\}$. These tangents are reported in the figure as red lines and represent the response of the equivalent elastic continuum as obtained through homogenization, which is now recalled from [2] and applied to the case under study.

Turning now the attention to the loss of ellipticity in the elastic material equivalent to the grid, the critical pair n_E^1 and g_E^1 can be visualized in a polar plot of the square root of the lowest eigenvalue of the acoustic tensor (of the solid equivalent to the grid) reported in figure 13, for two levels of uniaxial prestress, corresponding to failure or ellipticity in compression p_{1E}^- and tension p_{1E}^+ , both reported in table 1. The plot also includes with a dashed grey line the behaviour of the equivalent continuum without prestress, where ellipticity is preserved.

Owing to the orthotropy inherited from the elastic grid, loss of ellipticity at the parabolic boundary in the equivalent elastic material occurs with the normal to the shear band n_E^1 parallel (orthogonal) to the preload for compression (for tension). The associated eigenvectors g_E^1 remain orthogonal to the corresponding normals n_E^1 , indicating that the modes of localization are pure shear waves, the so-called ‘shear bands’.

The dynamic response evidenced by the dispersion surfaces and slowness contours (figure 12) and that of the equivalent continuum are confirmed in figures 14 and 15, where the behaviour of the grid (a-c) is compared with the behaviour of the equivalent continuum (d-f). Both the grid and the equivalent continuum are loaded through a pulsating force (applied at the central node, C_3 in figure 2b), vertical in the former figure, and horizontal in the latter. The behaviour of

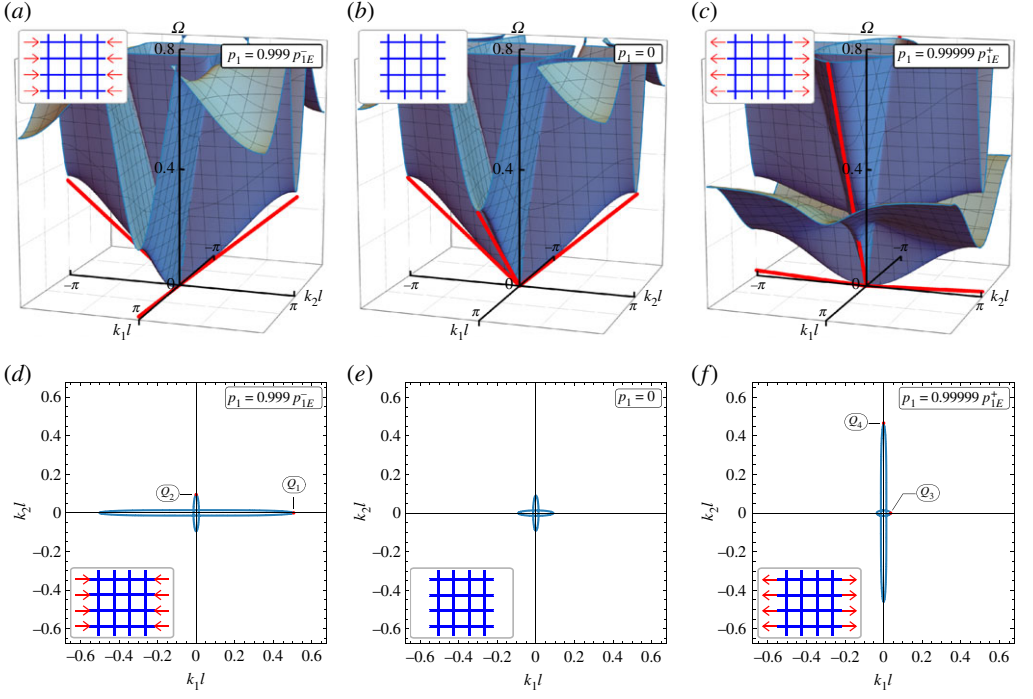


Figure 12. Dispersion surfaces (a–c) and slowness contours (d–f) at low frequency $\Omega = 0.01$ for preload levels near macro bifurcation in compression (a,d) and tension (c,f), compared with the case of null preload (b,e). The infinite-wavelength bifurcation occurs at the vanishing slope of one of the acoustic branches at the origin when the preload reaches the critical values reported in table 1. Red lines are tangent to the surfaces at the origin and represent the response of the equivalent continuum.

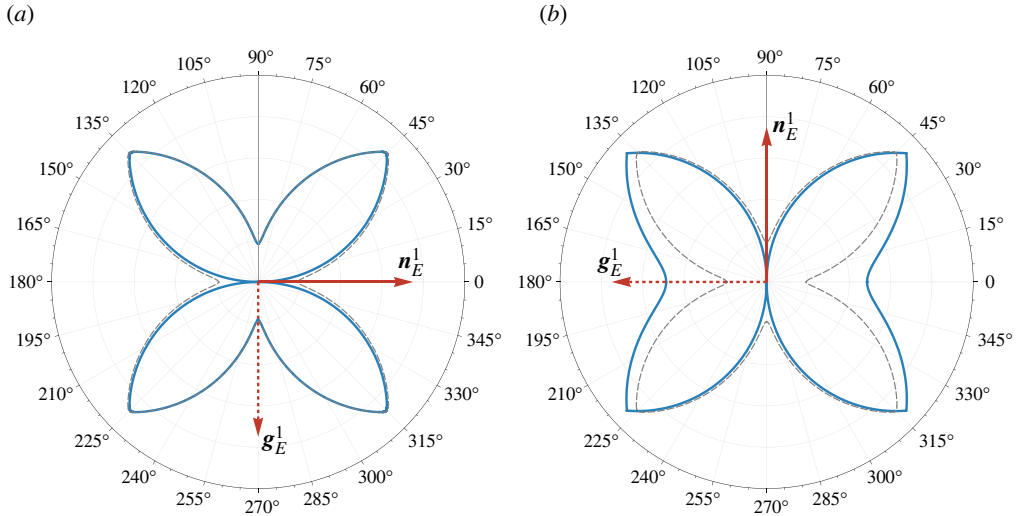


Figure 13. Polar plots of the square root of the lowest eigenvalue of the acoustic tensor of the solid equivalent to the elastic grid, as a function of the propagation direction $\mathbf{n} = \cos \theta \mathbf{e}_1 + \sin \theta \mathbf{e}_2$, for a uniaxial prestress state at failure of ellipticity in: (a) compression ($p_1 = p_{1E}^- = -5.01017$); (b) tension ($p_1 = p_{1E}^+ = 34.066669$), see table 1. The dashed grey line reports the behaviour of the solid without prestress, where loss of ellipticity does not occur.

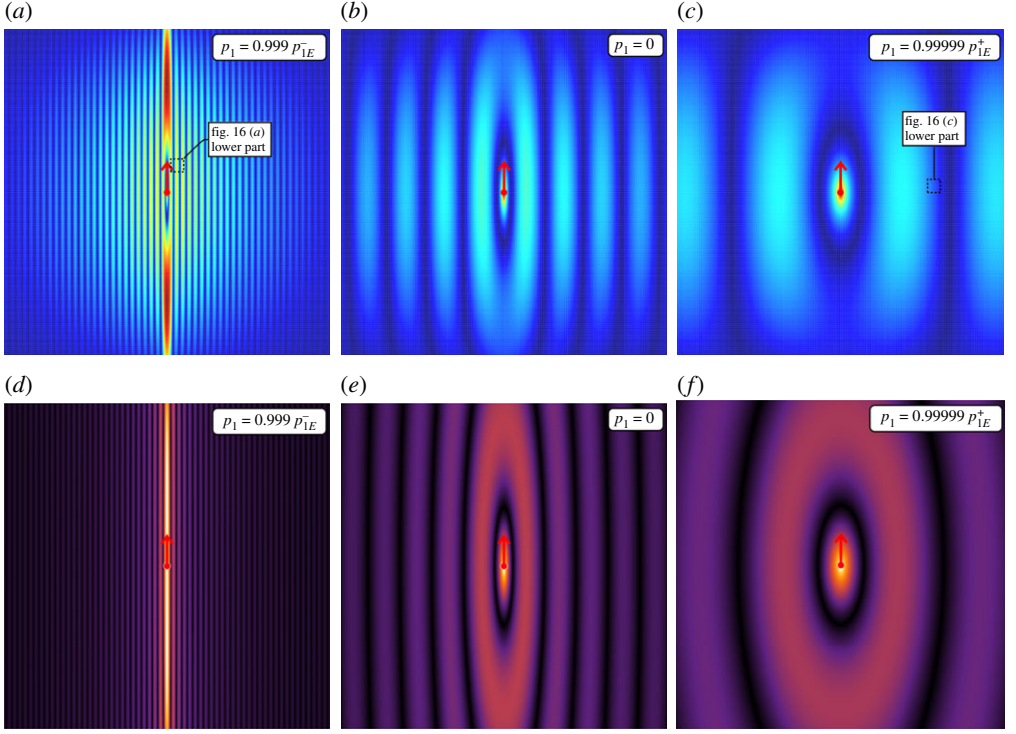


Figure 14. Displacement amplitude field during vibrations of a grid of Rayleigh rods with $\kappa = 100$, excited by a vertical time-harmonic force pulsating at frequency $\Omega = 0.01$. The preload in the horizontal rods is applied up to near the critical values p_{1E}^- and p_{1E}^+ , see table 1. The plots show shear band formation (a,d) near ellipticity loss, contrasted with the elliptic case (where shear bands are excluded, b,e) and the other case of loss of ellipticity in tension (where shear bands do not emerge, c,f).

the grid is numerically obtained via F.E., while the equivalent continuum is loaded with Green's function obtained in [15], so that an analytical solution is plotted. The low-frequency regime is investigated in the figures, with the concentrated forces pulsating at the dimensionless angular frequency $\Omega = 0.01$. The two preload/prestress values $0.999 p_E^-$ and $0.99999 p_E^+$ are analysed, see table 1, while the case without prestress is included for comparison. Note that to give full evidence to the shear band formation, the prestress has to be closest to the failure of ellipticity in tension (factor '0.99999') than in compression (factor '0.999').

Note that the two figures shown in figure 14b,e are the same as in figure 15b,e but rotated by $\pi/2$. This is not true for the other figures, due to the presence of the prestress, which is always horizontal and breaks the cubic symmetry.

Figures 14 and 15 show that the behaviour of the prestressed equivalent material perfectly describes the behaviour of the preloaded grid. The localization in a vertical (in a horizontal) shear band is evident in figure 14 (in figure 15) near the boundary of loss of ellipticity in compression $p_1 = 0.999 p_E^-$ (in tension $p_1 = 0.99999 p_E^+$). On the contrary, the particularly selected force does not excite localization, remaining unobserved in figure 14 (in figure 15) near the boundary of loss of ellipticity in tension $p_1 = 0.99999 p_E^+$ (in compression $p_1 = 0.999 p_E^-$). It can be concluded that for a vertical (horizontal) force, the effect of the tensile (compressive) prestress stabilizes both the grid and its equivalent continuum, so the wavelength of the displacement field increases compared with the case of the lattice without prestress.

The fact that shear bands occur parallel (orthogonal) to the direction of tensile (of compressive) prestress denotes the fact that ellipticity is lost at the parabolic boundary, [5]. In this case, the localization introduces a 'stress channelling', as noted by Pipkin [13]. Materials evidencing shear band formation at this boundary are rare. An example is the Mooney–Rivlin elasticity, but for this

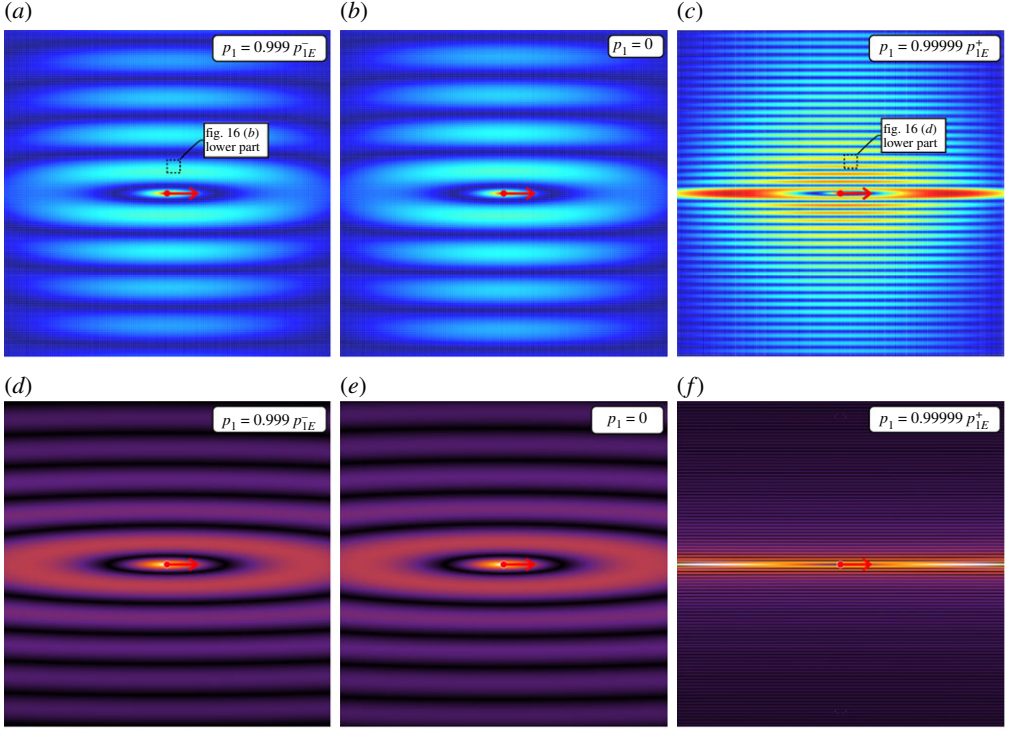


Figure 15. As for figure 14, except that the force is horizontal. Now shear bands appear near the boundary of ellipticity loss in tension (c,f), but not in compression (a,d).

model, ellipticity is lost at infinite strain and is therefore unachievable. Another material showing this behaviour is the masonry-like composite introduced in [14], but this material is based on unilateral contacts and does not resist tension. Other possibilities are composites with stiff and parallel fibres, as preconized in [13]. Therefore, the composite here introduced opens a new way to the design of these materials.

The behaviour of the grid and its homogenized counterpart (reported in figures 14 and 15) can be better understood by considering figure 16. To construct this figure, points have been selected at the ends of the branches of the slowness contours (two for critical negative prestress of compression, Q_1 and Q_2 , and the other two for critical positive prestress of tension, Q_3 and Q_4) shown in figure 12 (d-f). Points Q_1 and Q_2 refer to figures 14a and 15a, while points Q_3 and Q_4 refer to figures 14c and 15c, as indicated by the inset in the figures. For the selected points, the corresponding waveforms are reported in figure 16 for the unit cell (upper part) and for a portion of the grid (central and lower parts). The upper and central parts of the figure follow from the Floquet–Bloch analysis, while the lower part of the figure presents the displacement as calculated with F.E. simulations of the grid and therefore represent details of figures 14a–c and 15a–c referring to the zone marked in those figures.

The point Q_1 corresponds to the compressive instability: the propagation of a short-wavelength shear wave in the horizontal direction is evident; vertical rods translate longitudinally, whereas horizontal rods experience bending; all sliders are inactive.

Points Q_2 and Q_3 correspond to a stable deformation of the lattice: the propagation of a long-wavelength shear wave, corresponding to an almost rigid translation of the rods in the horizontal and vertical directions, respectively; all sliders are inactive.

The point Q_4 corresponds to the tensile instability of the lattice: the propagation of a short-wavelength shear wave in the vertical direction is visible; vertical rods undergo a rigid rotation and vertical sliders remain inactive, whereas horizontal rods are inflected and consequently

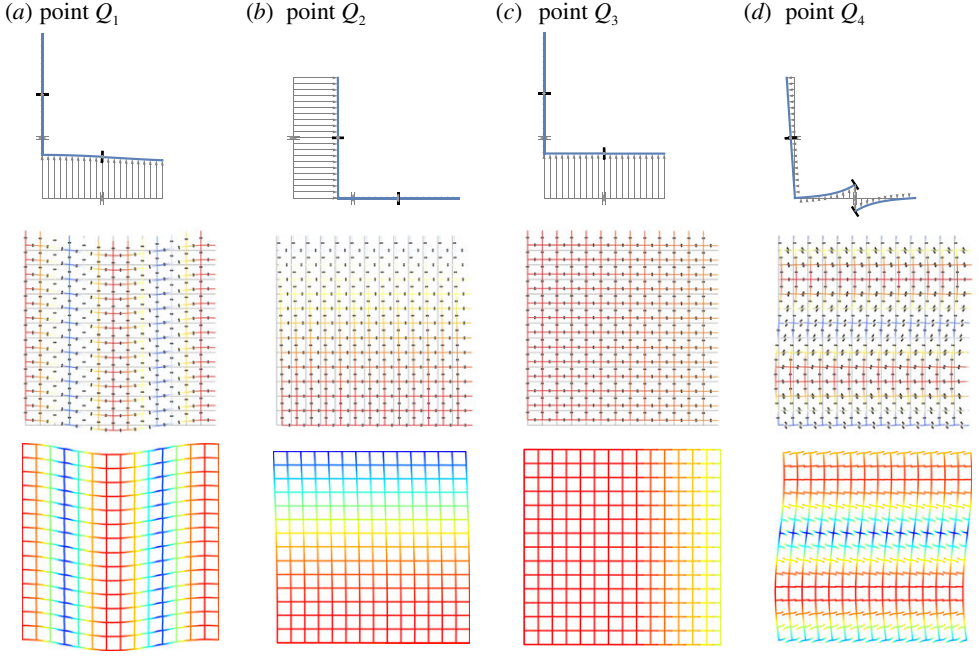


Figure 16. Selected waveforms for the grid of Rayleigh rods, for negative $a-b$ and positive $c-d$ values of the prestress p_1 near the boundary of ellipticity loss. The points Q_i are shown in the slowness contours, figure 12 lower part. (a) Point Q_1 , (b) Point Q_2 , (c) Point Q_3 , (d) Point Q_4 .

horizontal sliders open. This deformation mode confirms that a tensile instability in the lattice becomes possible with the activation of the sliders, as demonstrated in [1].

For the grid preloaded in compression, the propagation of the vertical shear waves, point Q_1 , is activated when a vertical pulsating force is applied, whereas for the lattice preloaded in tension, the propagation of the horizontal shear waves, point Q_4 , is activated by a horizontal pulsating force. In all four cases analysed, there is a perfect match between the waveforms of Bloch waves (figure 16 central part) and the displacements of the forced lattice (figure 16 lower part). It is worth noticing that the Fourier transform of the nodal displacements of the forced lattice, which displays the spectrum of the plane waves composing the dynamic response, nicely corresponds to the slowness contours obtained through the Floquet–Bloch analysis. For the four cases considered, the Fourier reconstruction of the signal is strongly focused around the points Q_i , confirming the fact that few plane waves are activated by the pulsating force. In particular, for the vertical force in compression and the horizontal force in tension, the spectra of the waves are focused around the directions of ellipticity loss, so that just the ‘slow’ plane waves that are close to causing the ellipticity loss prevail in the response, as it may be expected for a material near the elliptic boundary.

(b) Equibiaxial preload $p_1 = p_2$

The lattice is subject to an equibiaxial preload state, defined by the same values of axial force in the horizontal and vertical directions $p_1 = p_2$. The slider stiffnesses are again set equal to $\kappa = 100$. Occurrence of macro or micro bifurcations in the grid, corresponding to failure of ellipticity in the equivalent solid, are reported in terms of critical values of preload in table 2.

The table is analogous to table 1, except that in that table micro bifurcations are not present. The two tables share the right column, defining the same level of preload for which in one case a macro bifurcation occurs, while a micro bifurcation is critical in the other.

Table 2. Macro or micro bifurcations occurring in the elastic grid respectively in compression and tension, for different slider stiffness κ . Equibiaxial preload of the rods is assumed $p_1 = p_2$. The occurrence of macro bifurcation in the grid coincides with the loss of ellipticity in the equivalent continuum, where preload becomes equivalent to prestress. Micro bifurcations remain undetected in the equivalent solid.

critical values of equibiaxial preload $p_1 = p_2$ for macro or micro bifurcations		
slider stiffness κ	compressive critical preload p_E^-	tensile critical preload p_E^+
1	-0.687558 (macro bifurcation)	0.929147 (micro bifurcation)
10	-2.615260 (macro bifurcation)	6.659080 (micro bifurcation)
100	-4.741020 (macro bifurcation)	34.06669 (micro bifurcation)

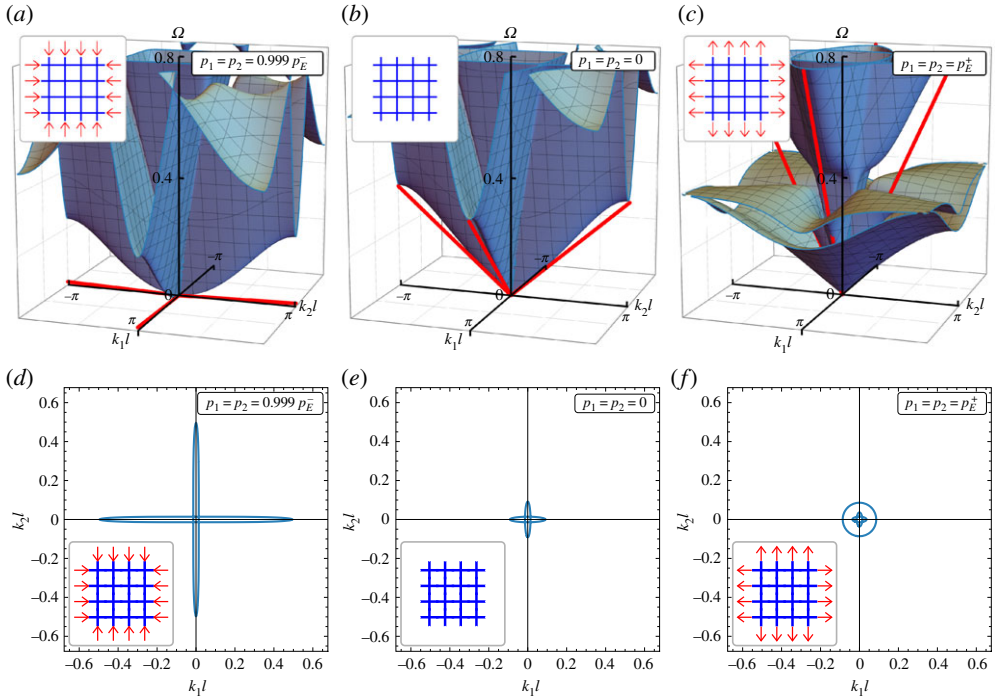


Figure 17. As for figure 12, except that the preload is biaxial $p_1 = p_2$. Dispersion surfaces (a–c) and slowness contours (d–f) are shown at low frequency $\Omega = 0.01$ for preload levels near macro bifurcation in compression (a,d) and micro bifurcation in tension (c,f), compared with the case of null preload (b,e).


Figure 17 is the counterpart of figure 12 and reports the dispersion surfaces (a–c) and the relative slowness contours (d–f) at low angular frequency, $\Omega = 0.01$, for a grid without preload (b,e), for a preload level close to macro instability in compression (a,d) and micro instability in tension (c,f).

As for figure 12, infinite-wavelength bifurcations occur at the vanishing slope of one of the acoustic branches at the origin of the space $\{\Omega, \mathbf{K}\}$ (tangents reported as red lines).

The critical pair n_E and g_E , corresponding to loss of ellipticity in the equivalent elastic continuum, is reported in the polar plot of figure 18, analogous to figure 13, except that now the preload is equibiaxial, $p_1 = p_2$.

Owing to the cubic symmetry inherited from the elastic grid, loss of ellipticity in the equivalent elastic material occurs along a pair of orthogonal directions n_E^1 and n_E^2 , to which the associated wave amplitudes g_E^1 and g_E^2 are orthogonal, indicating that the modes of localization are pure shear waves, i.e. shear bands.

(a)

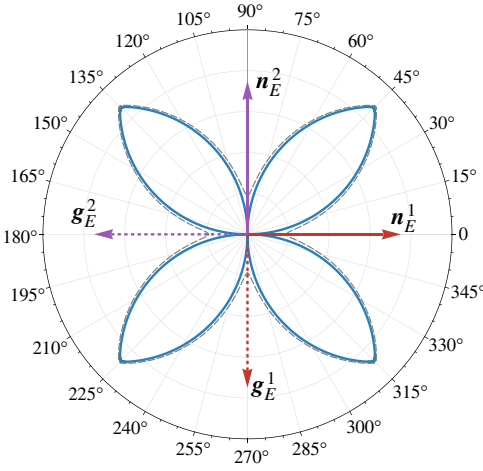

(b)



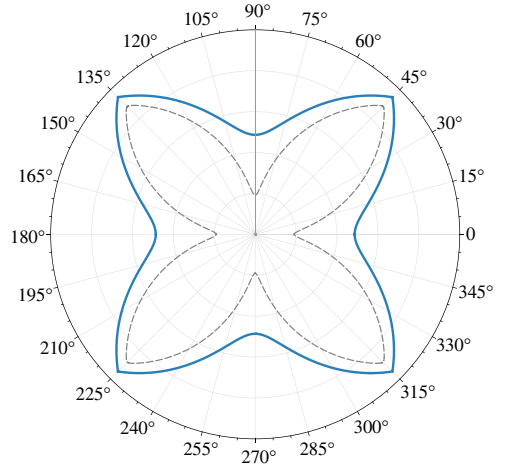


Figure 18. As for figure 13, except that the preload is equibiaxial, $p_1 = p_2$. Polar plots are reported of the square root of the lowest eigenvalue of the acoustic tensor of the solid equivalent to the elastic grid, for an equibiaxial prestress state at failure of ellipticity in: (a) compression ($p_1 = p_2 = p_E^- = -4.74102$); (b) tension ($p_1 = p_2 = p_E^+ = 34.06669$).


(a)




(b)




(c)

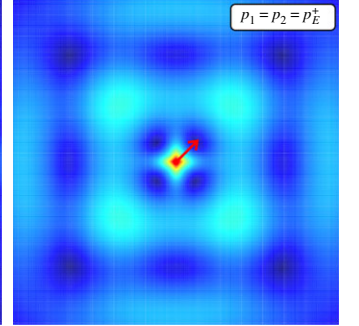

(d)

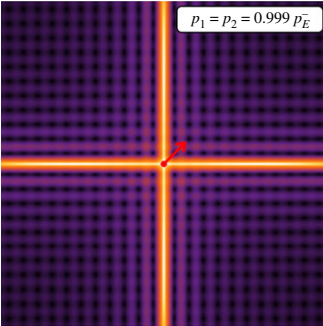

(e)



(f)

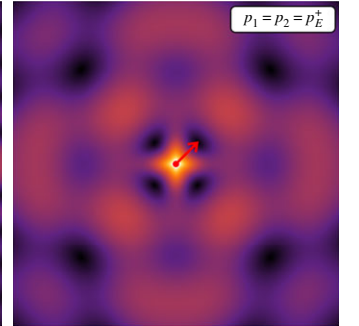


Figure 19. As for figure 14, except that the preload is equibiaxial, $p_1 = p_2$ and that the concentrated force is diagonally inclined (at $\pi/4$). The displacement field is shown during vibrations of a grid of Rayleigh rods at a frequency $\Omega = 0.01$, with the critical preload values, p_E^- and p_E^+ listed in table 2. Differently from the uniaxial preload, shear bands do not emerge at the failure of ellipticity in tension (c,f), where a micro bifurcation occurs simultaneously with the macro bifurcation and prevails on the latter. In compression (a,d) the inclined force excites both a horizontal and a vertical shear band.

The polar plot shown in [figure 18a](#) relates to the square lattice under the critical negative prestress p_E^- . Waves propagating along the horizontal and vertical directions possess equal velocities, hence ellipticity is lost when both of these velocities vanish at once, leading to two simultaneous shear bands with normals n_E^1 and n_E^2 .

When the critical positive prestress (tension) is approached, in the polar plot of [figure 18b](#) the eigenvalues of the acoustic tensor do not vanish, so that ellipticity of the equivalent continuum is preserved and a micro instability becomes critical. This singular behaviour occurs only in the special case of equibiaxial stress. In this case, the slope of the acoustic branches at the origin of the space $\{\Omega, K\}$ does not vanish, as is visible in [figure 17c](#). Therefore, in the case of tensile biaxial preload, a micro (instead of a macro) bifurcation of the lattice occurs, leaving the equivalent solid unaffected.

The dynamic response evidenced by the dispersion curves ([figure 17](#)) and that of the equivalent continuum are confirmed in [figure 19](#), where the behaviour of the grid (*a-c*) is compared with the behaviour of the equivalent continuum (*d-f*). Both the grid and the equivalent continuum are loaded through a pulsating force inclined at $\pi/4$ and applied at the central node (C_3 in [figure 2b](#)) in the lattice.

The low-frequency regime is investigated in the figure so that the concentrated force pulsates at the dimensionless angular frequency $\Omega = 0.01$. The three preload/prestress values $0.999 p_E^-$, 0 , and p_E^+ are analysed, see [table 2](#).

When the prestress is compressive and near failure of ellipticity, the inclined force simultaneously excites two shear bands, orthogonal to each other, [figure 19a,d](#). For a value of preload/prestress near failure of ellipticity in tension, [figure 19c,f](#), shear bands do not emerge. In this case, the homogenized response still captures the behaviour of the grid, but in the latter, a micro bifurcation occurs, although not activated by the point force applied at the central node.

This situation is analysed now in more detail focusing on the micro instability. The effects related to the latter can be revealed by applying the concentrated force on a face of a slider (for instance the left face of slider S_1 in [figure 2b](#)), instead of the central node of the grid (as in [figure 19](#)), or a concentrated bending moment at the central node of the grid. These two cases are reported in [figure 20](#), only pertaining to a grid of rods numerically solved via the F.E. method. Specifically, the case of a point force applied on the left face of a slider is reported in [figure 20a-c](#), whereas the case of a moment applied at the central node is reported in [figure 20d-f](#).

[Figure 20](#) reveals that for compressive and null preload the situation remains very similar to that shown in [figure 19a,b](#). However, there is a striking difference when the micro instability occurs (compare [figure 19c](#) with [figure 20c](#)). In the latter case, the loss of compliance induced by micro instability strongly limits the effects of the concentrated force and moment, which tend to vanish, namely, the bending and the node rotations extend to a limited number of rods in the close neighbourhood of the application point.

5. Concluding remarks

A rigorous Floquet–Bloch analysis and homogenization of periodic grids of preloaded elastic rods have shown that the inclusion of slider constraints introduces strong mechanical effects. These are related to the dynamics of the grid and the occurrence of localization of deformation in the form of shear bands. These localizations occur both in compression and in tension, so that materials working like thin sheets can be obtained and subjected to tensile loads. Metamaterials with embedded sliders can be designed in a way that shear bands emerge at the elliptic/parabolic boundary, evidencing a single shear band. In this way, stress channelling and vibration localization can be realized. These effects can be used to propagate signals in preferred directions within a plane, with minimal dispersion. The localization was shown to be activated or deactivated simply increasing or decreasing the axial preload of the rods. Therefore, the presented results open new possibilities in the mechanics of metamaterials.

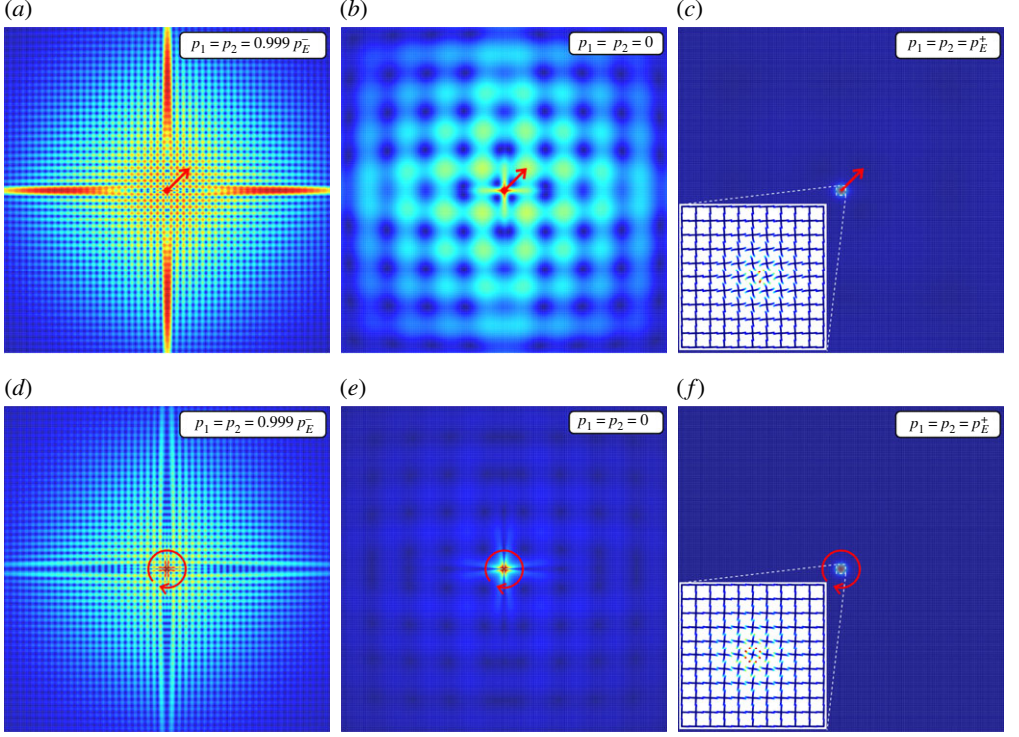


Figure 20. As for figure 19, except that the inclined force is applied on a slider face, instead of at the central node of the grid (*a–c*), and a concentrated moment is applied at the central node of the grid (*d–f*). While for compressive and null preloads the plots are very similar to those reported in figure 19*a,b*, the results pertaining to the failure of ellipticity in tension (*c,f*) show that a micro instability prevails so that the response to the applied force or moment remains strongly localized in a vanishing small neighbourhood of the application point.

Data accessibility. This article has no additional data.

Declaration of AI use. We have not used AI-assisted technologies in creating this article.

Authors' contributions. L.C.: conceptualization, data curation, formal analysis, investigation, methodology, software, supervision, validation, visualization, writing—original draft, writing—review and editing; D.B.: conceptualization, formal analysis, funding acquisition, investigation, methodology, project administration, resources, supervision, visualization, writing—original draft, writing—review and editing; A.P.: conceptualization, data curation, formal analysis, investigation, methodology, resources, software, supervision, validation, visualization, writing—original draft, writing—review and editing.

All authors gave final approval for publication and agreed to be held accountable for the work performed therein.

Conflict of interest declaration. We declare we have no competing interests.

Funding. All the authors acknowledged financial support from the European Research Council (ERC) under the European Union's Horizon 2020 research and innovation programme (grant agreement no. ERC-ADG-2021-101052956-BEYOND).

Appendix A. Full expression for the effective acoustic tensor

The complete analytic expression for the effective acoustic tensor of the lattice analysed in §2 is here reported in the dimensionless form $\bar{\mathbf{A}} = (EA_1/l_1) \bar{\mathbf{A}}$.

$$\bar{A}_{11} = \frac{k_1^2}{\xi} + \frac{a_{11}k_2^2}{\lambda_2^2 D},$$

$$\bar{A}_{22} = \chi k_2^2 + \frac{a_{22} k_1^2}{\lambda_1^2 \xi D},$$

$$\bar{A}_{12} = \bar{A}_{21} = k_1 k_2 \frac{a_{12}}{D},$$

where

$$\begin{aligned} a_{11} &= \lambda_1^2 \xi \chi^2 p_2^2 \left[e^{\sqrt{p_1}} (\sqrt{p_1} - 2) (p_1^{3/2} - 2\kappa_1) - (\sqrt{p_1} + 2) (p_1^{3/2} + 2\kappa_1) \right] \\ &\quad \times \left[e^{\sqrt{p_2}} (p_2^{3/2} - 2\kappa_2) + p_2^{3/2} + 2\kappa_2 \right] \\ &\quad + \lambda_2^2 \chi p_1 p_2^{3/2} \left[e^{\sqrt{p_2}} (p_2^{3/2} - 2\kappa_2) - (p_2^{3/2} + 2\kappa_2) \right] \left[e^{\sqrt{p_1}} (p_1^{3/2} - 2\kappa_1) + p_1^{3/2} + 2\kappa_1 \right], \\ a_{22} &= \lambda_1^2 \xi \chi p_1^{3/2} p_2 \left[e^{\sqrt{p_1}} (p_1^{3/2} - 2\kappa_1) - (p_1^{3/2} + 2\kappa_1) \right] \left[e^{\sqrt{p_2}} (p_2^{3/2} - 2\kappa_2) + p_2^{3/2} + 2\kappa_2 \right] \\ &\quad + \lambda_2^2 p_1^2 \left[e^{\sqrt{p_2}} (\sqrt{p_2} - 2) (p_2^{3/2} - 2\kappa_2) - (\sqrt{p_2} + 2) (p_2^{3/2} + 2\kappa_2) \right] \\ &\quad \times \left[e^{\sqrt{p_1}} (p_1^{3/2} - 2\kappa_1) + p_1^{3/2} + 2\kappa_1 \right], \\ a_{12} &= 2\chi p_1 p_2 \left[e^{\sqrt{p_1}} (p_1^{3/2} - 2\kappa_1) + p_1^{3/2} + 2\kappa_1 \right] \left[e^{\sqrt{p_2}} (p_2^{3/2} - 2\kappa_2) + p_2^{3/2} + 2\kappa_2 \right], \\ D &= \lambda_1^2 \xi \chi p_2 \left[e^{\sqrt{p_1}} (\sqrt{p_1} - 2) (p_1^{3/2} - 2\kappa_1) - (\sqrt{p_1} + 2) (p_1^{3/2} + 2\kappa_1) \right] \\ &\quad \times \left[e^{\sqrt{p_2}} (p_2^{3/2} - 2\kappa_2) + p_2^{3/2} + 2\kappa_2 \right] \\ &\quad + \lambda_2^2 p_1 \left[e^{\sqrt{p_2}} (\sqrt{p_2} - 2) (p_2^{3/2} - 2\kappa_2) - (\sqrt{p_2} + 2) (p_2^{3/2} + 2\kappa_2) \right] \\ &\quad \times \left[e^{\sqrt{p_1}} (p_1^{3/2} - 2\kappa_1) + p_1^{3/2} + 2\kappa_1 \right]. \end{aligned}$$

References

1. Zaccaria D, Bigoni D, Noselli G, Misseroni D. 2011 Structures buckling under tensile dead load. *Proc. R. Soc. A* **467**, 1686–1700. (doi:10.1098/rspa.2010.0505)
2. Bordiga G, Bigoni D, Piccolroaz A. 2022 Tensile material instabilities in elastic beam lattices lead to a bounded stability domain. *Phil. Trans. R. Soc. A* **380**, 20210388 (doi:10.1098/rsta.2021.0388)
3. Bordiga G, Cabras L, Piccolroaz A, Bigoni D. 2021 Dynamics of prestressed elastic lattices: homogenization, instabilities, and strain localization. *J. Mech. Phys. Solids* **146**, 104198 (doi:10.1016/j.jmps.2020.104198)
4. Nieves M, Mishuris G, Slepian L. 2016 Analysis of dynamic damage propagation in discrete beam structures. *Int. J. Solids Struct.* **97–98**, 699–713. (doi:10.1016/j.ijsolstr.2016.02.033)
5. Bigoni D. 2012 *Nonlinear solid mechanics: bifurcation theory and material instability*, 1st edn. Cambridge, UK: Cambridge University Press.
6. Triantafyllidis N, Schnaidt WC. 1993 Comparison of microscopic and macroscopic instabilities in a class of two-dimensional periodic composites. *J. Mech. Phys. Solids* **41**, 1533–1565. (doi:10.1016/0022-5096(93)90039-I)
7. Willis J. 2009 Exact effective relations for dynamics of a laminated body. *Mech. Mater.* **41**, 385–393. (doi:10.1016/j.mechmat.2009.01.010)
8. Santisi d’Avila M, Triantafyllidis N, Wen G. 2016 Localization of deformation and loss of macroscopic ellipticity in microstructured solids. *J. Mech. Phys. Solids* **97**, 275–298. (doi:10.1016/j.jmps.2016.07.009)
9. Willis JR. 2011 Effective constitutive relations for waves in composites and metamaterials. *Proc. R. Soc. A* **467**, 1865–1879. (doi:10.1098/rspa.2010.0620)
10. Castañeda P. 1989 The overall constitutive behaviour of nonlinearly elastic composites. *Proc. R. Soc. A* **422**, 147–171. (doi:10.1098/rspa.1989.0023)

11. Avazmohammadi R, Ponte Castañeda P. 2016 Macroscopic constitutive relations for elastomers reinforced with short aligned fibers: instabilities and post-bifurcation response. *J. Mech. Phys. Solids* **97**, 37–67. (doi:10.1016/j.jmps.2015.07.007)
12. Furer J, Ponte Castañeda P. 2018 Macroscopic instabilities and domain formation in neo-Hookean laminates. *J. Mech. Phys. Solids* **118**, 98–114. (doi:10.1016/j.jmps.2018.05.006)
13. Pipkin AC. 1984 Stress channelling and boundary layers in strongly anisotropic solids. In *Continuum theory of the mechanics of fibre-reinforced composites* (ed. AJM Spencer), pp. 123–145. Vienna, Austria: Springer.
14. Bigoni D, Noselli G. 2010 Localized stress percolation through dry masonry walls. Part I – Experiments. *Eur. J. Mech. A. Solids* **29**, 291–298. (doi:10.1016/j.euromechsol.2009.10.009)
15. Piccolroaz A, Bigoni D, Willis JR. 2006 A dynamical interpretation of flutter instability in a continuous medium. *J. Mech. Phys. Solids* **54**, 2391–2417. (doi:10.1016/j.jmps.2006.05.005)