

Traffic Control in a Mixed Autonomy Scenario at Urban Intersections: An Optimal Control Approach

Arnob Ghosh and Thomas Parisini, *Fellow IEEE*

Abstract—We consider an intersection zone where autonomous vehicles (AVs) and human-driven vehicles (HDVs) can be simultaneously present. As a new vehicle arrives, the traffic controller needs to decide and suggest an optimal sequence of the vehicles which will exit the intersection zone. The traffic controller can inform the time at which an AV can cross the intersection; however, the traffic controller can not communicate with the HDVs, rather the HDVs can only be controlled using the traffic lights. We formulate the problem as an integer constrained nonlinear optimization problem. Since the number of possible combinations increases exponentially with the number of vehicles in the traffic system, we relax the original problem and propose an algorithm which gives the optimal solution of the relaxed problem and yet only scales linearly with the number of vehicles in the system. The numerical validation shows that our algorithm outperforms the First-In-First-Out (FIFO) algorithm.

I. INTRODUCTION

A. Motivation

The autonomous vehicle technology has the potential to transform the transportation system in a disruptive manner. For example, the traffic intersection controller can communicate with the autonomous vehicles (AVs), assumed to be connected in this work. Ideally, in a future intelligent transportation system, the traffic controller will obtain the optimal trajectory for each vehicle by solving an optimization problem and subsequently, will communicate the optimal decision to the AVs. The AVs would then follow the solution provided by the traffic-controller. However, in current and near future scenarios, the human driven vehicles (HDVs) and AVs will co-exist. Such a scenario, in which AVs and HDVs do co-exist is known as *mixed autonomy*. While the intersection controller can communicate with the AVs, it can not communicate with the HDVs. Thus, such a mechanism will not work in the mixed autonomy context. As a consequence, the traffic-intersection controller needs to decide the optimal schedule in which vehicles will enter the intersection and control the traffic-light accordingly. The HDVs behave in a nonlinear, and unpredictable manner. Thus, computing an optimal schedule

is inherently challenging in a mixed autonomy scenario. We seek to contribute in this space.

B. Related Literature

The design of mechanism for AVs to cross the intersection has been studied in the literature [1]–[12]. A detailed discussion of the overall research in this area can be found in [13]. The world-leading Prof Cassandras’ group has conducted several research efforts in developing optimal control mechanism to control the vehicles’ trajectories at the intersections when there are only connected AVs. For example, [14] has considered a decentralized optimal control framework for coordinating AVs crossing an urban intersection without explicit traffic signaling. In [15], [16] the authors proposed a sequencing process which minimizes the energy consumption as well. [17] presented an approach based on Cooperative Adaptive Cruise Control for minimizing intersection delay and maximizing the throughput. Unsignalized traffic-intersection has also been also considered in [18], [19].

In the present paper, we consider a mixed traffic scenario consisting of HDVs and AVs simultaneously present unlike the above papers. Hence, a traffic controller at the urban intersection should consider both the AVs and HDVs while taking its decision. The presence of the HDVs along with the AVs make the decision process more challenging. First, the traffic-controller can not communicate with the HDVs. Second, one still requires signalized traffic intersections to control the movement of the HDVs in order to avoid collision. [20] studied the impact of the HDVs on the energy consumption in an urban intersection. [21]–[24] studied the optimal arrangement of HDV and AV in a ring which would stabilize the system. [25] studied the impact of the presence of the AV. However, all these papers do not propose any optimization mechanism to optimize in the mixed autonomy scenario. [26] has proposed a white-phase inside the traffic-light phase to allow platooning. However, the above paper considered connected HDVs where HDVs can follow command provided by the traffic-intersection controller. Instead, we propose a mechanism where the HDVs need not be connected. Thus, our mechanism can be applied to a more general set-up. Further, the above paper considered a cycle-based traffic-light system where each cycle is of fixed duration, instead, in our setting the traffic-light is adapted based on the schedule of the vehicle, hence, the duration can be of variable length.

The closest to our work are the optimization-based frameworks proposed for mixed-autonomy in [27]–[29]. In [28], [29], the authors optimized the traffic-phase duration. In contrast, our approach seeks to decide the optimal schedule

This work has been partially supported by the European Union’s Horizon 2020 research and innovation programme under grant agreement No 739551 (KIOS CoE) and by the Italian Ministry for Research in the framework of the 2017 Program for Research Projects of National Interest (PRIN), Grant no. 2017YKXYXJ.

A. Ghosh is with the Dept. of Electrical and Computer Engineering at the Ohio State University, Columbus, USA. He was with the Dept. of Electrical and Electronic Engineering at the Imperial College of London, UK, when the majority of this work was carried out. (ghosh.244@osu.edu)

T. Parisini is with the Dept. of Electrical and Electronic Engineering at Imperial College London, UK, with the KIOS Research and Innovation Centre of Excellence, University of Cyprus, and also with the Dept. of Engineering and Architecture at the University of Trieste, Italy (t.parisini@gmail.com)

of vehicles. Hence, instead of deciding whether the phases will be green or red, in our approach, the traffic-lights can be adjusted to much granular level as the traffic-lights can be changed based on the schedule of the vehicles which will enter the intersection. In [27], the authors proposed an algorithm to compute optimal sequence in which the vehicles enter the intersection. However, in all the above papers, the authors considered the scenario where the traffic-intersection controller controls the trajectories of *all* the autonomous (connected) vehicles. In contrast, our approach does not seek to compute and inform the trajectory of all the AVs, rather the traffic-controller only provides information to those AVs which will face red-light when they become the lead vehicles. Our proposed algorithm only informs the time at which an AV can enter. Thus, the AV does not need to compute all the other vehicles' trajectories in order to determine its own trajectory unlike in the above papers. Once a schedule is computed, the traffic-intersection controller adjusts the traffic-light duration based on the schedule in our approach whereas in the above papers, it requires to compute the trajectory every time instance to communicate with the AVs. Hence, it greatly reduces the communication cost compared to the existing work. Our proposed algorithm only considers among the sequences involving the newly entered vehicle and the vehicles at the conflicting lanes. On the other hand, in the above papers, the computation is redone by considering all the vehicles. Thus, the computation cost is also smaller in our approach compared to the above papers. Our method is a combination of the decentralized and centralized approach— where the traffic-controller only computes the optimal schedule decision centrally, the dynamics decisions are taken by the vehicles in a decentralized manner unlike the complete centralized approach considered in the above papers. Our objective considers the fuel cost, and the velocity of the vehicles in addition to the delays of the individual vehicles unlike in the above papers.

C. A Glimpse on the Optimization Problem

We consider a traffic intersection zone at an urban setting. The intersection zone consists of a control zone and the merging zone, which together is called a *system* (Section II). As a new vehicle arrives at the control zone, the traffic controller needs to determine the order at which the vehicles including the newly arrived vehicle would enter the intersection. It is an online decision process and the sequence is updated as soon as a new vehicle arrives. The traffic-light state at lanes is computed from the scheduling decision as the vehicles from the conflicting lanes can not enter the intersection simultaneously (Section II-D). The dynamics of the vehicles depend on the traffic-light state. The traffic intersection controller informs the time to an AV when it can enter the intersection if it has entered the lane at a lead vehicle (i.e, the front vehicle at the control zone of that lane). If an AV is not the lead vehicle and can not enter the intersection immediately following its preceding vehicle, i.e., it faces a red-light when it becomes the lead-vehicle, the traffic controller also informs the AV at what time it can enter the intersection. The AV then adjusts its dynamics and enters the intersection at the specified time

with the highest possible velocity (Section II-E). Intuitively, it increases the throughput.

We assume that if a HDV is a lead vehicle, it would decelerate at a uniform rate after seeing the red light (Section II-F1). When the green-light is switched on, if the HDV is the lead vehicle it would accelerate at a uniform rate till the velocity reaches the maximum value. The traffic controller can not communicate with the HDVs specifying the times at which they can enter the intersection unlike the AVs. We assume that when the HDVs follow other vehicles, their dynamics are governed by the preceding vehicles (Section II-F2). The time at which all the vehicles enter the intersection and exit the intersection are completely specified once the lead vehicle's dynamics is specified at a lane using a recursive equation and the scheduling decision of the traffic-intersection controller.

We formulate the problem of determining the optimal sequence of vehicles crossing the intersection as an optimization problem (Section III-B). We consider the following objectives for the traffic controller: (a) Minimize the total energy cost; the energy cost is defined as the L_2 -norm of the acceleration/retardation across the time the vehicles spend in the system; (b) minimize the total time each vehicle takes to cross the intersection; (c) maximize the velocity at which the vehicle can enter the intersection; if more vehicles enter the intersection at the speed limit it would increase the throughput; (d) minimize the overall time taken for all the vehicles to cross the intersection.¹ In the optimization problems velocities and accelerations of the vehicles are constrained. The decision variable is the schedule of the vehicles present at the system, the scheduling decision must satisfy the safety constraint where the vehicles from the conflicting lanes can not present at the merging zone at a time (Section II-C).

The optimization problem is computationally hard to solve. The objective is non-linear and the equality constraints are non-linear since the time at which vehicles enter the intersection are non-linear functions of the dynamics. Further, the optimization problem has integer valued variables which specifies the order at which the vehicles would enter the intersection from the conflicting lanes. The number of possible sequences increase exponentially with the number of vehicles in the system (Section III-A). Thus, we consider a relaxed version of the problem where the traffic controller would only determine among the sequences involving the newly arrived vehicle and the vehicles in the conflicting lanes of the newly entered vehicle (Section III-A). The relative order of other vehicles in which they will enter the intersection is kept unchanged. We show that such a relaxation drastically reduces the number of possible combinations as the complexity only increases linearly with the number of vehicles in the worst case. We propose an algorithm which solves the relaxed optimization problem (Section IV-A).

We, empirically show that our algorithm reduces the total time taken by all the vehicles by at least 50% compared to the FIFO sequence proposed in the existing literature (Section VI). In the FIFO, whichever vehicle enters the control zone first

¹Objectives (b) and (d) are not the same, (b) seeks to minimize the time each vehicle spends in the system; on the other hand, (d) seeks to minimize the total time it takes for all the vehicles to exit the intersection.

also enters the intersection first. We show that our algorithm significantly improves the performance when the penetration of the AV is small. We show that our algorithm increases the average velocity at which vehicles enter the intersection by at least 30%, minimizes the time taken by each vehicle to cross the intersection by at least 40%, and minimizes the magnitude of acceleration/deceleration compared to the FIFO. Unsurprisingly, we show that as the AV penetration rate increases, our algorithm performs better. We demonstrate that our proposed mechanism can be extended to the scenario where the HDVs deviate from the nominal values of the model assumed in the paper.

II. PROBLEM FORMULATION

In this section, we describe the traffic intersection system under consideration (Section II-A). Next, we describe the safety constraint the traffic-intersection controller must satisfy while taking the decision (Section II-C). Also, in Section II-D the way the traffic-intersection controller changes the red and green lights at a lane based on the optimal sequence is illustrated. Finally, we model the dynamics of AVs and HDVs (Sections II-E and II-F) which describe how the vehicles approach ideally the intersection for a given sequence of the vehicles in which they enter the intersection.

A. The Intersection and Control Zone

We consider a merging zone in an urban setting. Let $N(t)$ be the cumulative number of vehicles which are present at the system at time t . The intersection system consists of a control zone and a merging zone. When a new vehicle arrives in the control zone, the traffic controller computes a sequence which denotes the order in which the existing vehicles will enter and exit the intersection system or the merging zone.

The vehicles form a queue at different lanes at an intersection. Note that if a queue is non-empty, a vehicle must wait until at least all of the vehicles in-front of it enter the merging zone before it enters the merging zone. The control zone and the merging zone are depicted in Figure 1. The control zone is of length L in each lane. After the control zone, a vehicle enters an intersection or merging zone of length S .

Fig. 1 depicts the scenario where vehicle V_5 enters the system with 3 more vehicles (V_2, V_3 and V_4) that are already in the system. The traffic controller needs to determine the optimal exit sequence among the existing vehicles in order to minimize the total travel time, maximize the velocity they can travel, and minimize the frequent change in velocities of the vehicles. Note that the vehicles from lane 3 and vehicles from lanes 2, and 4 can not cross the intersection simultaneously. Hence, the traffic controller needs to determine vehicles from which lane should enter while closing the other lanes in order to avoid collision.

The traffic controller can coordinate with the AVs by informing the AVs to know the time at which they can cross the intersection if they are the lead-vehicles (Definition 4) or when they *can not enter* the intersection immediately after their preceding vehicles as the vehicles from other lanes will enter the intersection before. The traffic controller can not

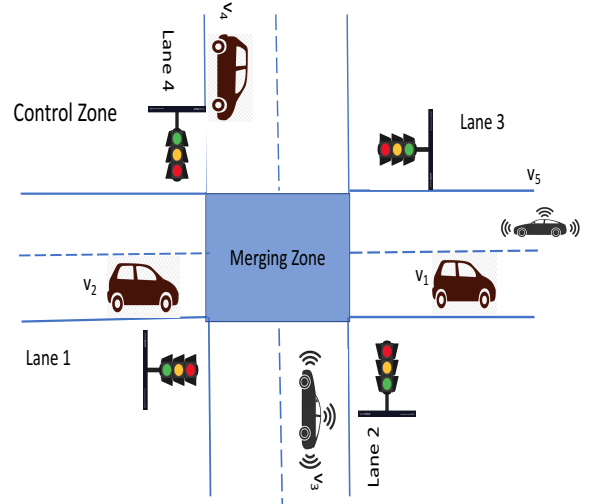


Fig. 1. Illustration of a traffic intersection control where a traffic controller decides the optimal sequence of vehicles which would cross the intersection and take actions accordingly. AVs are denoted with signs of being capable to communicate with the traffic controller. Vehicles from lane 1 can collide with vehicles from lane 2 and lane 4. Vehicles from lane 2 can collide with vehicles from lane 3 and lane 1.

coordinate with the HDVs. Rather, the HDVs only follow the traffic-lights.

Throughout this paper, the following assumption is in place.

Assumption 1. *The vehicles are going straight and no turn is allowed. The vehicles are either going from east to west and west to east, or north to south and south to north.*

The traffic-controller can not communicate with the HDV regarding the time at which they can enter the intersection. The traffic intersection controller can sense the HDV's position and velocity accurately.

The AVs are connected and controllable. The traffic controller can send a signal when to enter the merging zone to a AV.

Lane changing is not acceptable within the control and intersection zone.

As described in Fig. 1, there are 4 conflict points even for this basic set-up. Note that in practice, the traffic intersection controller can only have an estimate of a vehicle's position and velocity. In that case, we consider the worst case position and velocity of a vehicle. Empirically, we show the impact of the estimation errors in Section VI-B5. Note that even though we have not considered any turning behavior, our model can be extended to accommodate the lane changing behavior as discussed in Section V-D.

B. Notations and Significance

We introduce some notations which we use throughout the paper. At the control zone, a vehicle is completely specified by the tuple $(i;j)$ where j denotes the lane and i denotes the i -th vehicle in the lane from the intersection. The vehicles are numbered in the order they are closer to the intersection. Vehicle $(i-1;j)$ is the vehicle immediately preceding the

vehicle i . Vehicle i at lane j enters the control zone at time t_{ij}^0 . Definition 4. When $i = 1$ for vehicle $(i; j)$, then it is the lead-vehicle in the control zone of lane j .

The position and speed of the vehicle $(i; j)$ at time t are denoted by $p_{ij}(t)$ and $v_{ij}(t)$ respectively. v_m is the speed limit. v_{free} is the desired velocity of the system. In our set-up we consider $v_{free} = v_m$, the maximum speed. However, it is not a restrictive assumption.

v_{free} can be governed by the speed at the neighboring intersections as well. For example, if there is a congestion, vehicles may not move at the maximum speed. Our model can be extended to those scenarios. In fact, in Section V-C, we show how our model can adapt to different values for v_{free} .

Definition 1. For vehicle of any type, the time at which vehicle $(i; j)$ would cover the distance $L + S$ starting from time t_{ij}^0 and travelling at a constant speed v_m is given by t_{ij}^m :

$$t_{ij}^m = t_{ij}^0 + \frac{L + S}{v_m} \quad (1)$$

The time at which the vehicle $(i; j)$ would cover the distance L starting from t_{ij}^0 at a constant speed v_m is

$$t_{ij;m}^0 = t_{ij}^0 + \frac{L}{v_m} \quad (2)$$

$t_{ij;m}^0$ and t_{ij}^0 indicate the times vehicle $(i; j)$ would reach the intersection and cross the intersection if it would not be subject to any traffic. Note that $t_{ij;m}^0$ (t_{ij}^0 , resp.) is equal to the initial time plus the time the vehicle takes to travel the distance $L + S$ (L , resp.) at the maximum speed. Thus, they represent the times the vehicle take to exit the control zone and merging zones in the idealistic scenario where the vehicle would exit the system if there is no traffic. These values will be used to compute the total delay the vehicle would face because of the traffic and the decision of the traffic-intersection controller.

When the vehicle $(i; j)$ enters the control zone, its position satisfies $p_{ij}(t_{ij}^0) = 0$. When the vehicle $(i; j)$ in the control zone enters the intersection or merging zone then it is denoted as $(i^0; j)$ which explicitly denotes the identity of the vehicle at the control zone. Once a vehicle exits the intersection, that vehicle is removed from the system.

Definition 2. We denote t_{ij}^m and t_{ij}^f as the times the vehicle $(i; j)$ enters and exits the intersection respectively.

Formally, $t_{ij}^m = \inf t | p_{ij}(t) > L$, and $t_{ij}^f = \inf t | p_{ij}(t) = L + S$.

Note that a vehicle may stop just before entering the intersection where $p_{ij}(t) = L$, in this case the vehicle is not in the merging zone. We assume that a vehicle is only in the merging zone where $p_{ij}(t) > L$. Note that in the idealistic scenario, $t_{ij}^m = t_{ij;m}^0$ and $t_{ij}^f = t_{ij}^0$. However, because of the traffic and the decision of the traffic-intersection controller those relationships may hold in our scenario, and t_{ij}^m and t_{ij}^f are determined from the scheduling decision.

Definition 3. We denote the delay as t_{ij}^d since this is the additional time the vehicle $(i; j)$ takes to exit the system because of the traffic and the traffic-intersection controller's decision.

Definition 5. Let L_j denote the set of vehicles in a lane j . The set L_j is ordered in the sequence the vehicles arrive in the lane j . The first element in the set L_j is the first one among the existing vehicles in lane j to arrive in the lane j and it is the lead vehicle in lane j .

Definition 6. Let M_j denote the set of conflicting lanes of lane j .

In Fig. 1, lanes 2 and 4 belong to M_1 . Since we have 4 lanes, for the non-conflicting lane 0 of j , $M_{j^0} = M_j$. For example, in lanes 2 and 4 also belong to M_0 .

Definition 7. Let $b_{ij;l;k} = 0$ if the vehicle $(i; j)$ enters the intersection before the vehicle $(l; k)$ where $k \in M_j$ and $l \in M_k$, otherwise $b_{ij;l;k} = 1$.

If $b_{ij;l;k} = 0$, then $b_{l;k;ij} = 1$. Note that the traffic-controller decides $b_{ij;l;k}$ which characterizes the sequence order. Since no passing is allowed within a lane, it is obvious that vehicle $(i; j)$ can only enter the intersection after $(i - 1; j)$ if $i > 1$. We only need to compute sequence order among the vehicles at the conflicting lanes. At time t , the traffic-intersection controller decides $b_{ij;l;k}$ to schedule the vehicles among the conflicting lanes by maintaining the safety constraint which we describe next.

The Safety Constraint

The traffic controller needs to ensure that the vehicles from colliding lanes can not be present at the intersection at the same time. Thus, vehicle $(i; j)$ and any vehicle from the lanes M_j can not be present simultaneously at the intersection. For example, in Fig. 1 the vehicles from lane 1 and 2 can not cross the intersection at the same time since they can collide with each other. Thus, lanes 1 and 2 are colliding lanes with each other. Vehicles from a lane can only enter the merging zone when there are no vehicle from the colliding lane in the merging zone.

Recall that t_{ij}^m is the time when the vehicle $(i; j)$ enters the intersection. Hence, the safety or feasibility constraint for any vehicle $i \in L_j$ is

$$(t_{ij}^m; t_{ij}^f) \setminus (t_{l;k}^m; t_{l;k}^f) = \emptyset \quad \forall l \in M_k; k \in M_j \quad (3)$$

The above constraint ensures that any vehicle in the conflicting lanes can not enter the intersection at the same time with vehicle $(i; j)$. Note that certainly the constraint can be relaxed and vehicles from conflicting lanes M_j can enter at times where t_{ij}^m is small enough to ensure that the vehicles will not collide. Our analysis and model can be easily extended to the above scenario.

Safety constraint (3) can be represented in terms of the decision variable $b_{ij;l;k}$ as follows:

$$\begin{aligned} t_{ij}^m & b_{ij;l;k} t_{l;k}^f & \forall l \in M_k; k \in M_j \\ t_{l;k}^m & (1 - b_{ij;l;k}) t_{ij}^f & \forall l \in M_k; k \in M_j \end{aligned} \quad (4)$$

If $b_{i,j;k} = 0$, then, the vehicle $(i;j)$ would enter the intersection before the vehicle $(l;k)$ and the vehicle $(l;k)$ can only enter the intersection at time t_{ij}^f , the time when the vehicle $(i;j)$ exits the intersection. The traffic-controller decides $b_{i,j;k}$ which in turn specifies the red-light and green-light timings at a lane, which in turn governs the dynamics of the vehicles and the times t_{ij}^m and t_{ij}^f .

D. Traffic Light System

In this section, we describe how the decision $b_{i,j;k}$ characterizes the time when the traffic-light is red or green at each lane. The traffic controller computes an order of vehicles in which they will enter the intersection or merging zone. When a vehicle enters the merging zone, the corresponding traffic-light at that lane must be green.

If the traffic-intersection controller decides $b_{i,j;k} = 1$, and $b_{i-1,j;k} = 0$, i.e., the vehicle $(l;k)$ from conflicting lane k enters the intersection before vehicle $(i-1;j)$ and after vehicle $(i-1;j)$ enters the intersection, then the traffic controller will put a red-light at lane j after the vehicle $(i-1;j)$ enters the intersection. We now describe when the vehicle $(i;j)$ will face green-light again.

First, we introduce some notations.

Definition 8. Let $j_i(k) = \arg \max_{l \in \{1, 2, \dots, 2M_j\}} l | b_{l,j;k} = 1$ g

The index $j_i(k)$ denotes the largest index among the vehicles $(l;k)$ in the conflicting lane k of the lane j which will enter the merging zone before the vehicle $(i;j)$. Vehicles $((j_i(k) + 1; k); \dots; (j_i(k); k))$ will enter the intersection before the vehicle $(i;j)$. Hence, the vehicle $(j_i(k) + 1; k)$ (if it exists) can only enter the merging zone after the vehicle $(i;j)$ exits the intersection (otherwise $(j_i(k) + 1; k)$ would have been the maximum).

Note that if $j_{i-1}(k)$ and $j_i(k)$ are not the same for any $k \in \{1, 2, \dots, 2M_j\}$, then vehicle $(i;j)$ can not enter the intersection immediately preceding the vehicle $(i-1;j)$. Rather vehicles $((j_{i-1}(k) + 1; k); \dots; (j_i(k); k))$ from the conflicting lane k will enter the intersection before the vehicle $(i;j)$. Thus, in between a red-light must be on at lane

Let $r_j(t)$ and $g_j(t)$ denote whether the traffic-light is red and green respectively at lane $j = 1; \dots; 4$ at time t . Specifically, if $r_j(t) = 1$, the traffic-light is red at lane j , otherwise it is 0. On the other hand, $g_j(t) = 1$ denotes that the traffic-light is green at lane j at time t . We do not consider any amber-light and we denote how to accommodate the amber-light in Section V-A

If $i \in \{1\}$ when it enters the control zone, then, it will be the lead-vehicle after $t_{i-1,j}^m$, i.e., when the vehicle $(i-1;j)$ enters the intersection. If $j_{i-1}(k)$ and $j_i(k)$ are different for any $k \in \{1, 2, \dots, 2M_j\}$, then after the vehicle $(i-1;j)$ enters the intersection, the vehicle $(i;j)$ has to wait till the time $(j_i(k); k)$ exits the intersection. Note that there are two conflicting lanes of lane j since we consider a 4-way intersection. Hence, we also need to consider $b_{i,j;k-1}$ where $k_1 \in \{1, 2, \dots, 2M_j\}$, and $k_1 \in k$.

If $j_i(k)$ and $j_{i-1}(k)$ are different for any $k \in \{1, 2, \dots, 2M_j\}$, $g_j(t_{i-1,j}^m) = 1$, however, $r_j(t_{i-1,j}^m + \epsilon) = 1$, i.e., the traffic-light is red at lane j as soon as the vehicle $(i-1;j)$ enters

the vehicle. Hence, the traffic-light can be adapted at any lane.

The green-light will be switched on at lane j again at time

$$t_{ij}^g = \max_{k \in \{1, 2, \dots, 2M_j\}} t_{j_i(k);k}^f \quad (5)$$

Hence, $r_j(t) = 1$ for $t \in (t_{i-1,j}^m; t_{ij}^g)$. Specifically, the vehicle $(i;j)$ has to wait till the time all the vehicles $(l;k)$ such that $b_{i,j;l;k} = 1$ exit the intersection. If $j_i(k)$ and $j_{i-1}(k)$ are the same for all $k \in \{1, 2, \dots, 2M_j\}$, then the vehicle $(i;j)$ will face the green-light after the vehicle $(i-1;j)$ enters the merging zone. In this case $r_j(t) = 0$ for $t \in (t_{i-1,j}^m; t_{ij}^m)$. Thus, the vehicle $(i;j)$ does not observe the red-light.

The decision $b_{i,j;k}$ completely characterizes the times at which the red-light or green-light will be switched on at lanes j . For example, first consider among the front vehicles, i.e., $i = 1$ at lane j and $l = 1$ at lane $k \in \{1, 2, \dots, 2M_j\}$. If $b_{1,j;1;k} = 0$, for all $k \in \{1, 2, \dots, 2M_j\}$, then the green-light will be on for lane j next. If $j_i(k)$ is different for some k at lane j compared to $j_{i-1}(k)$, the red-light will be switched on after the vehicle $(i;j)$ enters the intersection. The vehicles $(l;j_i(k); k)$ for $k \in \{1, 2, \dots, 2M_j\}$ will then exit the intersection before again the green-light will be switched on at lane j .

On the other hand, $b_{i,j;k} = 0$ for some $k \in \{1, 2, \dots, 2M_j\}$, then, the vehicle $(l;k)$ would enter the intersection before the vehicle $(i;j)$ where $i = 1$. The time the green-light will be on at lane j is computed from t_{ij}^g .

Finally, the times at which the vehicles enter and exit the intersection depend on the red-light and green-lights which in turn depend on the decision $b_{i,j;k,l}$. Thus, we slight abuse of notation, we denote $t_{ij}^m(b)$ and $t_{ij}^f(b)$ as functions of $b = \{b_{i,j;k,l}\}$. We sometimes make this dependence explicit. The dependence are explicitly defined by the dynamics of the vehicles and $b_{i,j;k}$ which we describe next.

Assumption 2. If there is no vehicle in the control zone at a lane, the red-light will be switched on.

The above assumption is made for the ease of exposition and can be relaxed. The above assumption states that when the vehicle $(i;j)$ is the lead-vehicle at the control zone as it enters the lane j , it will initially face a red-light. The green-light will be switched on based on the decision made by the traffic-controller.

Note that when $j_i(k)$ and $j_{i-1}(k)$ are different, then the vehicle $(j_i(k); k)$ would enter the intersection before the vehicle $(i;j)$. However, the vehicle $(j_i(k) + 1; k)$ would not enter the intersection before the vehicle $(i;j)$. Hence, the red light will be switched on at lane j when the vehicle $(j_i(k); k)$ enters the intersection. Thus, during the time interval $(t_{j_i(k);k}^m; t_{ij}^g)$ all the traffic-lights are red. This ensures that the intersection is devoid of any vehicles from the conflicting lane k before the traffic-light is made green at lane j . Whenever a schedule contains two consecutive vehicles from conflicting lanes, red-light will be on for all the lanes in order to make sure that the vehicle in the preceding order exits the intersection.

E. Dynamics of AV and communication with the traffic controller in the control zone

In this section, we describe the dynamics of the vehicles impacted by the decisions of the traffic-intersection controller.

We first describe the dynamics for the AV ($i; j$) where $j_i(k)$ and $j_{i-1}(k)$ are different (see Definition 8) for some $k \in \mathbb{M}_j$. Here, we also discuss the scenario where the AV enters the intersection as a lead-vehicle. The scenario where the AV enters the intersection as a lead-vehicle is considered in Section II-F2.

In the above scenario where $j_i(k)$ and $j_{i-1}(k)$ are different for some $k \in \mathbb{M}_j$, the traffic-intersection controller informs the AV when it can enter the intersection by computing (cf. (5)). The traffic-controller also informs the time at which the vehicle ($i; j$) can enter the intersection when the AV is the lead-vehicle, i.e., it is the only vehicle at the control zone when it enters.

AV ($i; j$) is governed by the following dynamics in this scenario

$$\begin{aligned} \frac{dp_{i;j}}{dt} &= v_{i;j}(t); & p_{i;j}(t_{i;j}^0) &= 0; \\ \frac{dv_{i;j}}{dt} &= u_{i;j}(t); & v_{i;j}(t_{i;j}^0) &= v_{ini} \end{aligned} \quad (6)$$

Recall that $t_{i;j}^0$ is the time when vehicle ($i; j$) enters the system. $t_{i;j}^f$ is the time the vehicle leaves the system. $u_{i;j}(t)$ is the control signal or acceleration for the AV ($i; j$).

To ensure that the speed and the control input of the AVs are within acceptable limits, we have the following

$$\begin{aligned} u_{min} &\leq u_{i;j}(t) \leq u_{max} \\ v_{min} &\leq v_{i;j}(t) \leq v_{max} \end{aligned} \quad (7)$$

Recall that in our setting $v_{max} = v_m$.

At time t , the traffic-controller computes the decision $\mathbf{d}_{i;j,k}$. If $j_i(k)$ and $j_{i-1}(k)$ are different, then the traffic-intersection controller computes the time $t_{i;j}^0$ at which it can enter the intersection and informs the AV. The AV then updates its dynamics at time t .

Since the AV can not enter the intersection before the time $t_{i;j,m}^0$, the traffic controller would let the AV know a time $t_{i;j,m}^0$ at which it can enter the intersection. The AV would like to approach the intersection at the maximum velocity v_m . We assume that the AV would try to minimize the total energy expenditure. Hence, the AV controller solves the following problem

$$\begin{aligned} & \text{minimize} && \int_{t_{i;j,m}^0}^{t_{i;j}^m} u_{i;j}(t)^2 dt \\ & \text{subject to} && p_{i;j}(t_{i;j}^m) = L; \quad v_{i;j}(t_{i;j}^m) = v_m; \quad (6); \&(7) \end{aligned} \quad (8)$$

The decision variable is $\mathbf{d}_{i;j}(t)$. The AV enters the intersection at time $t_{i;j}^m$ with the highest speed v_m . The time at which AV HDV will exit the intersection will be smaller. Further, the vehicles following the AV are also expected to enter the intersection at the speed close to the highest speed. Thus, the throughput will increase. In Section VI-B7, we describe the impact of

The initial conditions are the velocity and position of the vehicle ($i; j$) at time t when the optimization problem is solved. The first objective specifies the cost due to acceleration or deceleration. The first constraint ensures that the distance traversed by the vehicle ($i; j$) is L at $t_{i;j}^m$ and the second constraint ensures that when the AV enters the intersection it does so at the free speed. Note that

Even though we consider that the vehicle ($i; j$) enters the intersection at the maximum speed, our model can be extended to the scenario where the traffic-controller mandates that the velocity at the intersection be velocity other than the speed-limit in order to control the speed of vehicles at the neighboring intersections. How the intersection-controller chooses such a velocity is beyond the scope of this paper.

Theorem 1. If a feasible solution exists, the solution is unique, and we denote the solution as

$$(u_{i;j}(t); v_{i;j}(t); p_{i;j}(t)) = F(t_{i;j}^0; t_{i;j}^m; v_{initial}; L) \quad (9)$$

where $v_{initial} = v_{free}$ is the initial velocity and L is the distance need to be transversed from time $t_{i;j}^0$ to $t_{i;j}^m$.

Proof. Please see our arxivd paper [30]. \square

When $v_{ini} = v_m$, and $t_{i;j}^m = t_{i;j,m}^0$, $u_{i;j}(t) = 0$ for all t from the optimization problem in (8). The vehicle in lane j would move at uniform maximum speed. Note that the function $F(\cdot)$ specifies the control acceleration, velocity and position at every time of the AV when the time to enter the intersection and the initial times are specified.

Remark 1. The energy cost may be smaller in the scenario where we do not put the requirement that the velocity of the AV when it would enter the intersection must do at the speed close to the speed limit. We can consider such a scenario by relaxing the constraint. However, detailed analysis is kept for the future.

Note that for a given sequence $\mathbf{d}_{i;j,k}$, we determine the time at which the vehicle enters the intersection. However, given this $t_{i;j}^m$, there may not be any solution of eqn. (8).

Definition 9. If for a certain decision $\mathbf{d}_{i;j,k}$, there does not exist any feasible solution of (8), then we denote $\mathbf{d}_{i;j,k}(b) = 1$.

Thus, if for a certain decision taken by the traffic-intersection controller, there is no feasible solution of (8), we specify the time $t_{i;j}^m$ as 1. We utilize the above to discard such sequence which renders the solution infeasible when we describe the optimization problem for the traffic-intersection controller in Section III-B.

F. Dynamics of the Human-Driven Vehicles

The traffic-controller can not communicate the time the HDV can enter the intersection specially when it becomes the lead-vehicle in the control zone. Rather, the dynamics of the HDV when it is the lead-vehicle at the control zone, is impacted whether the traffic-light is red or green at time

1) The dynamics when a HDV is the leading vehicle:

Generally, a HDV only brakes when it is at $mds(l)$ distance from the intersection when it sees a red light. Thus, if the red-light is on when the HDV is more than $mds(l)$ distance away from the intersection, the HDV would not decelerate. If $l = L$, it means that the control zone is small, the vehicle ($i; j$) would decelerate as soon as it enters the control zone if the traffic-light is red at large

We assume that the HDV will decelerate with uniform retardation a . Hence, the dynamics of the HDV, when it encounters the red light, i.e. $f_j(t) = 1$, is the following

$$\frac{dv_{ij}(t)}{dt} = \begin{cases} a & \text{if } p_{ij}(t) > L \\ 0 & \text{otherwise.} \end{cases} \quad (10)$$

the deceleration a is such that the vehicle stops just before entering the merging zone. In particular, if the vehicle faces the red-light (i.e., the red-light is switched on) at a distance L away from the intersection, then the magnitude of a is $\frac{v_s^2}{2s}$ where v_s is the velocity when it faces the red-light. Note that even though the retardation is not uniform, one can consider the average retardation, and the analysis still holds.

Note that it may happen that when the vehicle faces the red-light, it is very close to entering the intersection, then the deceleration may be below the minimum value. Specifically, if

$$\frac{v_s^2}{2s} > j u_{\min} \quad (11)$$

then, a deceleration is required which is lower than the minimum value. Thus, such a sequence would not be feasible. Hence, similar to Definition 9, we make $\alpha_{ij}^m = 1$: In Section III-B, we then see that such a sequence will never be chosen.

When a HDV sees a green light again, it would accelerate unless it is moving at the maximum speed. We assume that the HDV accelerates with a constant acceleration a_h . Thus, when $f_j(t) = 1$, we have

$$\frac{dv_{ij}(t)}{dt} = \begin{cases} a_h & \text{if } v_{ij}(t) < v_m \\ 0 & \text{otherwise} \end{cases} \quad (12)$$

Note that the red-light and green-light phases are governed by the decision $b_{i,j;l,k}$ taken by the intersection controller.

2) Dynamics of vehicles when it follows other vehicles: The dynamics of HDVs when they follow the other vehicles and the AV $(i;j)$ for which $j_i(k)$ and $j_{i-1}(k)$ are the same (i.e., it will face green-light after it becomes the lead-vehicle), are given by popular vehicle following model.

The dynamics of a HDV in such a scenario is described using the Intelligent Driver Model (IDM) [31]. It is an easy-to-tune adaptive cruise control system able to avoid vehicle collision in car-following mode. The dynamics for the vehicle $(i;j)$ is given by:

$$v_{ij}(t) = u_{\max} \left[1 - \frac{v_{ij}(t)}{v_m} \right] + \frac{s_{f_{ij-1g}}(t)}{s_{f_{ij-1g}}(t) + 2A} \left[\frac{v_{ij-1g}(t)}{v_m} - v_{ij}(t) \right] \quad (13)$$

where $s_{f_{ij-1g}}(t) = p_{i-1j}(t) - p_{ij}(t)$ is the current inter-vehicle distance, is a small number which makes the denominator always non-zero, and $s_{f_{ij-1g}}$ is the desired inter-vehicle distance:

$$s(v_{ij}(t); v_{f_{ij-1g}}(t)) = s_0 + T_{ij} v_{ij}(t) + \frac{v_{ij}(t) v_{f_{ij-1g}}(t)}{2 u_{\max} u_{\min}} \quad (14)$$

where $v_{f_{ij-1g}}(t) = v_{ij-1}(t)$ is the vehicles' difference in speed, u_{\min} is the maximum deceleration, s_0 is the safe distance, and T_{ij} the safety time gap between two vehicles. Note that s is the ideal distance that should be maintained between the vehicle $(i;j)$ and $(i-1;j)$ when the vehicle $(i;j)$ is moving at a speed $v_{ij}(t)$ and the inter-vehicular speed is $v_{f_{ij-1g}}(t)$. s increases as the vehicle $(i;j)$ approaches a slower vehicle (since the vehicle may need to brake). On the other hand, s decreases as the vehicle $(i;j)$ approaches a faster vehicle.

In order to ensure that the velocity is bounded between v_{\max} and v_{\min} , we impose

$$v_{ij}(t) = \max \{ \min \{ v_{ij}(t); v_{\max} \}; v_{\min} \} \quad (15)$$

If the vehicle $(i;j)$ is an AV, we use the same dynamics. However, the parameter T_{ij} is smaller if the vehicle is an AV.

In Section V-B, we discuss how our model can accommodate parameter values different from the estimated ones. Note that our model can easily be extended to other popular vehicle following models such as Newell [32], optimal velocity model, and full velocity model. We use the IDM since empirically it performs the best among all the other vehicle models to mimic the behavior of the vehicles [33], [34].

Remark 2. Note that velocity and acceleration of a vehicle is completely specified by the lead vehicle dynamics and the decision $b_{i,j;l,k}$. When the lead vehicle dynamics is known, the vehicle following the lead vehicle is computed according to the dynamics of the vehicles. Thus, in a recursive manner, the dynamics of all the existing vehicles in a lane are known.

The time at which the vehicle $(i;j)$ will enter and exit the intersection given by the position model of the vehicle. Thus, the time all the vehicles will enter and exit the intersection can also be computed in a recursive manner.

Note that the values of $b_{i,j;l,k}$ precisely determine $f_j(t)$ and $f_j(t)$ for a lane $j = 1; \dots; 4$ as described in Section II-D.

Thus, the dynamics of vehicles are completely characterized once $b_{i,j;l,k}$ is known.

Hence, the time at which the vehicle $(i;j)$ enters the intersection or merging zone computed at time t is given by

$$t_{ij}^m = t_{ij}^m(t; b) \quad (16)$$

where t_{ij}^m also depends on the positions, and velocities of vehicles at time t . As mentioned, t_{ij}^m is computed recursively starting from the first vehicle in the control zone at lane j .

We represent the velocity and position profile of the vehicle $(i;j)$ as the function of the decision variable as the following

$$(v_{ij}(t); p_{ij}(t)) = t_{ij}(t; b) \quad (17)$$

The velocity and position profiles are also obtained in a recursive manner based on the decision $b_{i,j;l,k}$.

G. Dynamics of the vehicles in the merging zone

When in the merging zone, the vehicle $(i;j)$ is represented by $(i_i^0; j)$. If the vehicle $(i_i^0; j)$ is leader at lane j , its dynamics is given by (12). The length of the merging zone is such that the velocity can reach the maximum value v_{\max} within

the merging zone. If the vehicle is following another vehicle and the existing vehicles at the conflicting lanes. The then its dynamics is given by (13) irrespective of whether the relative order among the vehicles other than (i; j) are kept the same. Note that when a vehicle enters the merging zone, it does not face any traffic light anymore, hence, its dynamics is not impacted by the traffic-light. When the traffic-controller informs the AV the time at which it can enter the intersection, the AV enters at the maximum speed as specified in Theorem 1. Also, note that such an AV will also be the leading vehicle. Hence, the AV moves at the constant speed after entering the merging zone.

The decision $b_{i;j;l;k}$ specifies when the vehicle (i; j) will exit the intersection which is computed using the velocity and position profile of the vehicle. We characterize

$$t_{i;j}^f = f_{i;j}(t; b) \quad (18)$$

$f_{i;j}$ is inherently a function of the velocity and position of vehicle (i; j) at time t and decisions $b_{i;j;l;k}$. Similar to $t_{i;j}^m$, $t_{i;j}^f$ can also be computed recursively starting from the leading vehicle and $b_{i;j;l;k}$.

III. TRAFFIC CONTROLLER'S DECISION-MAKING STRATEGY

When a new vehicle (i; j) arrives, the traffic controller decides the sequence at which the vehicle will exit the intersection. In this section, we first describe a relaxed problem which significantly reduces the computational complexity (Section III-A). Subsequently, we formulate the optimization problem, the solution of which gives the optimal sequence (Section III-B).

We introduce a notation which we use throughout this section. Let $\text{Seq}(t)$ be the order of the vehicles present at time t at the control zone which will enter the intersection. When a vehicle exits the control zone and enters the merging zone, the vehicle is removed from the control zone and put into the merging zone system. All the vehicles' ids' at that lane are reduced by 1, i.e., the vehicle (i; j) becomes (i - 1; j) if a vehicle from lane j enters the merging zone. Once a vehicle exits the intersection, that vehicle is removed from the system. The traffic-intersection controller only seeks to schedule vehicles at the control zone.

A. Reducing the Complexity

The possible number of combinations increases exponentially with the number of vehicles in the system. For example, if there are two conflicting lanes and there are n number of vehicles in each lane, the possible number of combinations is 2^{2N} which is of the order of n^{2N} . Further, the dynamics of the vehicles are non-linear functions of the decision. Hence, finding an optimal sequence is inherently computationally challenging.

The traffic controller needs to decide the sequence order in real time, possibly within a few milliseconds. In order to reduce the complexity, we reduce the number of possible combinations by assuming the following:

Assumption 3. When a new vehicle (i; j) (i.e., it arrives at the intersection before the vehicle (l; k) needs to be recomputed before the vehicle (l; k) now enters the intersection before the vehicle (i; j).

The above assumption entails that if the sequence order before a new vehicle (i; j) arrives be S^{old} , i.e., $S^{\text{old}} = \text{Seq}(t_{i;j}^0)$ where $t_{i;j}^0$ is the time just before (i; j) arrives be $S^{\text{new}} = \text{Seq}(t_{i;j}^0)$ such that $S^{\text{new}}(m) = S^{\text{old}}(m)$ for any $m \leq m_1$ where $S^{\text{old}}(m_1) = (i - 1; j)$. Thus, the order of the vehicles till the preceding vehicle (i - 1; j) enters the intersection is kept unchanged. The order of the vehicles after the (i - 1; j) enters the intersection are changed.

The relative order of any vehicle (i⁰; j⁰) and (l; k) where $k \geq 2, M_j \leq l \leq M_j + 1$ is also kept unchanged (i; j) \in (i⁰; j⁰). Thus, if the vehicle (i⁰; j⁰) enters the intersection before the vehicle (l; k) that order is maintained. Hence, one only needs to compute the optimal sequence among the newly entered vehicle (i; j) and the vehicles at the conflicting lanes. If there are n number of vehicles in the conflicting lanes, we need to consider n-possible combinations in the worst case. Hence, the computational complexity reduces from exponential order to the linear order of the number of vehicles in the conflicting lanes. We later show that such a relaxation also simplifies the solution of an optimization problem.

The communication cost is also reduced. Note that the traffic controller needs to inform the AVs when they can enter the intersection if the current time needs to be updated because of the change in the schedule. Since potentially, at least the order of the vehicles till the vehicle (i - 1; j) enters the intersection is kept unchanged, thus, for those vehicles no additional information is required to be sent.

Thus, we only compute $b_{i;j;l;k}$ with keeping other decisions $b_{i;j;l;k}$ intact. In the following, we describe the optimization problem which chooses the optimal $b_{i;j;l;k}$.

Note that we are certainly doing a trade-off between finding the optimal solution and finding a solution with a low computational complexity. In Section V-E, we describe the optimality gap using a toy example.

B. Objective

When the new vehicle (i; j) arrives the traffic-controller decides $b_{i;j;l;k}$ only among (i; j) and the vehicles (l; k) where $l \geq 2, M_j \leq l \leq M_j + 1$, i.e., the vehicles in the conflicting lanes.

We first introduce a notation which we use throughout this section. $b_{(i;j)}$ consists of all the decisions apart from the decisions $b_{i;j;l;k}$ for all (l; k); $l \geq 2, M_j \leq l \leq M_j + 1$.

1) Computation of the vehicles' dynamics: As a new vehicle (i; j) arrives at time $t_{i;j}^0$ and the traffic-controller decides $b_{i;j;l;k}$ at time $t_{i;j}^0$. The traffic controller computes the profiles of the vehicles based on the decision $b_{i;j;l;k}$ since the other decisions are kept unchanged. $b_{i;j;l;k}$ is sufficient to compute the dynamics of the vehicles as described in Sections II-E

and II-F. Note that if $b_{i;j;l;k} = 1$, the profile of the vehicle (l; k) remains the same as it is computed before the vehicle (i; j) enters the system. However, if $b_{i;j;l;k} = 0$, the profile

traffic-intersection controller only recomputes those velocity profiles of vehicles $(m; j)$ where $m < i$, this change in the cost is due to changes in the positions and velocities of vehicles which are changes because of the scheduling change. Since we are not changing the order of those vehicles. Further,

For vehicle $(l; k)$, the time when it can enter the intersection if $b_{i,j;l;k} = 1$, then $C_{l;k}(b) - C_{l;k}(b_{(i,j)}) = 0$. is given by (cf.(16))

$$\begin{aligned} t_{l;k}^m(b) &= t_{l;k}^m(t_{i,j}^0; b) \\ t_{l;k}^f(b) &= t_{l;k}^f(t_{i,j}^0; b); \end{aligned} \quad (19)$$

it indicates that the time is a function of the decision variables $b_{i,j;l;k}$. The position and velocity profiles are given by (cf.(17))

$$(v_{i,j}(t); p_{i,j}(t)) = (t_{i,j}^0; b) \quad (20)$$

If the vehicle $(i^0; j^0)$ has entered just before the vehicle $(i; j)$ in the system. The computed time is given by $t_{l;k}^m(b_{(i,j)})$ which does not include the decision variables $b_{i,j;l;k}$. Thus, because of the decision variables $b_{i,j;l;k} = 0$, the additional time the vehicle $(l; k)$ now takes to enter the intersection is $t_{l;k}^m(b) - t_{l;k}^m(b_{(i,j)})$.

Definition 10. We define the delay imposed by the newly entered vehicle $(i; j)$ on the vehicle $(l; k)$ as $t_{i,j;l;k} = t_{l;k}^m(b) - t_{l;k}^m(b_{(i,j)})$.

$t_{i,j;l;k} = 0$ if $b_{i,j;l;k} = 1$ as the vehicle $(i; j)$ does not cause any change to the profile of the vehicle $(l; k)$.

Note that even the vehicle in the non-conflicting lane of lane j (e.g., lane 3 of lane 1) since the ordering of the vehicles remain intact between $(l; k)$ and $(i; j)$. Thus, similar to the vehicle $(l; k)$ we also define

$$t_{r,j}^m = t_{r,j}^m(t_{i,j}^0; b); \quad t_{r,j}^f = t_{r,j}^f(t_{i,j}^0; b) \quad (21)$$

Similarly, for the velocity and position profile

$$(v_{r,j}(t); p_{r,j}(t)) = (t_{i,j}^0; b) \quad (22)$$

2) Energy Cost: For any vehicle the energy cost is defined as the area under the curve of the magnitude of the change in velocity over the time the vehicle spends in the system. i.e., $\int_{t_0}^{t_f} u_{i,j}(t)^2 dt$. We denote the energy cost $E_{i,j}(b)$ which explicitly depends on the decision variables $b_{i,j;l;k}$ since the vehicle dynamics, and $t_{i,j}^f$ are functions of b . The cost inherently depends on the position and velocity profile of the vehicles.

We will compute the energy cost imposed by the newly arrived vehicle $(i; j)$. This is the external cost incurred because of the newly entered vehicle $(i; j)$, also known as marginal cost a term which is popular in Economics. Even a vehicle $(i^0; j^0)$ which belongs to the non-conflicting lane of lane j its dynamics can be changed because of the decision variables $b_{i,j;l;k}$. For example, if $b_{i,j;l;k} = 0$, then the profile of the vehicle $(l; k)$ will be modified and if $b_{i^0,j^0;l;k} = 1$ then, the velocity profile of the vehicle $(i^0; j^0)$ will be modified. Note that all the vehicles $C_{m;j}(b)$ where $m < i$ since these vehicles' profiles are unchanged because of the newly entered vehicles. Similarly,

We denote the change in the energy cost because of the newly entered vehicle and the decision variables $b_{i,j;l;k}$ as $C_{i^0,j^0}(b) - C_{i^0,j^0}(b_{(i,j)})$ where we denote $C_{i^0,j^0}(b_{(i,j)})$ as 0 since the vehicle $(i^0; j^0)$ will enter the intersection at the end. Hence, solution of the optimization vehicle $(i; j)$ is the newly entered vehicle. Again, for the problem is well-defined.

3) Formulation of the Optimization Problem: We are now equipped with all the notations to describe the objective. We consider four objectives—

Minimize the additional energy cost of the vehicles incurred by the vehicle $(i; j)$.

$$O_1 = \sum_{j^0 \in M} \sum_{i^0 \in M} C_{i^0,j^0}(b) - C_{i^0,j^0}(b_{(i,j)}) \quad (23)$$

Minimize the additional time taken by the vehicles to exit the system because of the vehicle $(i; j)$

$$O_2 = \sum_{j^0 \in M} \sum_{i^0 \in M} t_{i^0,j^0}^f(b) - t_{i^0,j^0}^f(b_{(i,j)}) \quad (24)$$

The difference between the maximum speed and the velocity of the vehicles at the intersection must be minimized

$$O_3 = \sum_{j^0 \in M} \sum_{i^0 \in M} (v_m - v_{i^0,j^0}(t_{i^0,j^0}(b)))^+ - (v_m - v_{i^0,j^0}(t_{i^0,j^0}(b_{(i,j)})))^+ \quad (25)$$

The final time where all the vehicles would exit the intersection must be minimized.

$$O_4 = t^{\text{final}} = \max_{i^0,j^0} t_{i^0,j^0}^f(b) - \max_{i^0,j^0} t_{i^0,j^0}^f(b_{(i,j)}) \quad (26)$$

The first objective seeks to minimize the total energy cost incurred due to the latest scheduling change because of the

new vehicle $(i; j)$. The second objective seeks to minimize the time the vehicles take to exit the system. The third objective seeks to maintain the velocities of the vehicles close to the maximum speed limit when they enter the intersection. This will ensure that it maximizes the throughput. Final objective seeks to minimize the total time it takes for all the vehicles to exit the intersection. Since $b_{i,j;l;k}$ does not contain $b_{i,j;l;k}$, one can equivalently eliminate the terms which does not depend on $b_{i,j;l;k}$ and can represent everything as a function of $b_{i,j;l;k}$.

The optimization problem that the traffic controller solves is the following:

$$\begin{aligned} P : \min & \quad O_1 + O_2 + O_3 + O_4 \\ \text{subject to} & \quad (19); (20); (21); (22) \\ & \quad \text{variables } b_{i,j;l;k} \in [0, 1] \end{aligned} \quad (27)$$

The decision variable is $b_{i,j;l;k}$. The objectives are defined in (23)-(26). Note that for some sequence, if there does not exist any feasible solution (as of Theorem 1), then, corresponding to the vehicle $(i^0; j^0)$, the t_{i^0,j^0}^m is 1 and such a sequence

will never be selected. Note that there always exists at least one feasible sequence where the vehicle $(i; j)$ will enter the intersection at the end. Hence, solution of the optimization problem is well-defined.

IV. TRAFFIC CONTROLLER'S DECISION ALGORITHM

In this section, we discuss the algorithm for the traffic controller to determine the sequence when a new vehicle arrives in the control zone. Subsequently, we demonstrate the algorithm using an illustrative example.

First, we introduce some notations.

Definition 11. Let N_k be the number of vehicles at lane

Hence, $N_k = \sum_{j=1}^L N_{k,j}$. Recall that $\text{Seq}(t)$ represents the order in which the vehicles present at time t will enter the intersection. Let $S_{i,j}$ be the order in which the vehicles after the vehicle $(i;j)$ enters the intersection before the vehicle $(i+1;j)$ enters the intersection. Note that $\text{Seq}(t_{i+1;j}^0)$ is the sequence of the vehicles just before the vehicle $(i+1;j)$ enters the intersection. If $\text{Seq}(t_{i+1;j}^0)(m) = (i;j)$ then, $S_{i,j}(m_1) = \text{Seq}(t_{i+1;j}^0)(m+m_1)$. If two vehicles enter the intersection at same time from the non-conflicting lanes, then the tie is broken randomly. Further, if the vehicle $(i;j)$ is the last one which enters the intersection, then $S_{i,j}$ is empty. $S_{i,j}(n)$ denotes n -th component of the set $S_{i,j}$. Note that since the newly entered vehicle $(i+1;j)$ does not change the order of the vehicles till the vehicle $(i;j)$ enters the intersection, hence, in essence, we only need to compute the order of vehicles within $S_{i,j}$.

For example, in Fig 1, if the sequence is $v_3; v_2; v_4g$, then after the vehicle v_3 enters the intersection, the order for the rest of the vehicles is $v_2; v_4g$.

A. Algorithm

- 1) If the number of vehicle in the system is at lane j , when a new vehicle arrives in lane j , the new vehicle is represented as $(i+1;j)$. If multiple vehicles arrive at the same time, tie is broken arbitrarily.
- 2) Compute $t_{i+1;j}^0 = t_{i+1;j}^0 + \frac{L+S}{V_{\text{free}}}$. Initialize $n = 1$.
- 3) If $S_{i,j}(n)$ is empty, then skip the next steps and go to step 7.
- 4) If $S_{i,j}(n) = (i^0;j^0)$ for any i^0 where $j^0 \geq M_j$, then we go to step 6.
- 5) If $S_{i,j}(n) = (l;k)$, then we consider a possible decision $b_{l+1;j;m;k}[n] = 1$ for all $m \geq 1$ and $b_{l+1;j;m;k}[n] = 0$ for $m < 1$. Let $l_{k_1}^0 = \arg \min_l |l| S_{i,j}(n^0) = (l;k_1); n^0 > n$ where $k_1 \in k; k_1 \geq 2 M_j$. Thus, the vehicle $(l^0;k_1)$ at lane k_1 will wait till the vehicle $(i+1;j)$ enters the intersection under this schedule. Hence, $b_{l+1;j;m;k_1}[n] = 1$ for $m \geq l_{k_1}^0 + 1$ for $k_1 \geq 2 M_j; k_1 \in k$ and $b_{l+1;j;m;k_1} = 0$ for $m \geq l_{k_1}^0$. The order of the vehicles at lane j^0 where lane j^0 is non-conflicting to lane j can be obtained since the order of $(i^0;k)$ $k \geq 2 M_j^0$ remains the same as it was before the vehicle $(i;j)$ enters the control zone. Compute $t_{i+1;j}^{m;\text{temp}}[n] = t_{i+1;j}^0 + \frac{L}{V_{\text{free}}}; t_{i+1;j}^{f;\text{temp}}[n] = t_{i+1;j}^0$. The velocity profiles $v_{i+1;j}^{\text{temp}}[n](t)$ and position profiles $p_{i+1;j}^{\text{temp}}[n](t)$ are also computed. All the other vehicles' velocity and position profiles are also computed and are stored in $v_{i^0;j^0}^{\text{temp}}[n]; t_{i^0;j^0}^{\text{temp}}[n]; v_{i^0;j^0}^{\text{temp}}[n]$, and $p_{i^0;j^0}^{\text{temp}}[n](t)$. Compute the objective value.

- 6) If $S_{i,j}(n) = (i^0;j^0)$ where $j^0 \geq M_j$, then $\text{obj}[n] = 1$, otherwise store the objective value in step 5 as $\text{obj}[n]$. Make $n = n + 1$.

7) Let $z = \arg \min_n \text{obj}[n]$. Update $t_{l;k}^m = t_{l;k}^{m;\text{temp}}[z]; t_{l;k}^f = t_{l;k}^{f;\text{temp}}[z]; v_{l;k}(t) = v_{l;k}^{\text{temp}}[z](t); p_{l;k}(t) = p_{l;k}^{\text{temp}}[z](t)$
 8) $l \geq 2 M_j; k \geq 2 M_j$, $t_{i+1;j}^m = t_{i+1;j}^{m;\text{temp}}[z]; t_{i+1;j}^f = t_{i+1;j}^{f;\text{temp}}[z]$, and $v_{i+1;j}(t) = v_{i+1;j}^{\text{temp}}[z](t)$, $p_{i+1;j}(t) = p_{i+1;j}^{\text{temp}}[z](t)$. The sequence order is updated as $b_{i+1;j;l;k} = b_{i+1;j;l;k}[z]$.

- 8) The trajectory and dynamics of vehicles are updated. Update the sequence $\text{Seq}(t_{i+1;j}^0)$. If the vehicle $(i^0;j^0)$'s order is changed from $\text{Seq}(t_{i+1;j}^0)$, j^0 is different from $j_{i^0-1}^0$ and $(i^0;j^0)$ is an AV, then the traffic-controller informs the updated time the AV can now enter the intersection.

We obtain–

Theorem 2. The algorithm gives a solution of the optimization problem P in (27).

Proof. Since the algorithm picks the sequence among all the possible combinations for which the objective is the smallest, thus, it is a solution of Optimization problem in (29) \square

B. Discussion

When a vehicle $(i+1;j)$ enters the system, the traffic controller computes the current trajectory of the vehicle using the vehicle dynamics as discussed in Section II. The algorithm tries to find the optimal $b_{l+1;j;l;k}$ for $l \geq 2 M_k, k \geq 2 M_j$. The relative order of the other vehicles is kept the same. The algorithm enumerates over all the possible sequence among the newly entered vehicle and the vehicles at the conflicting lanes in the original computed sequence after the vehicle $(i+1;j)$ enters the intersection. Hence, the traffic-controller only needs to find the optimal position of the vehicle $(i+1;j)$ and the vehicles in $S_{i,j}$.

We select the first item of $S_{i,j}$. Suppose that it is $(l;k)$. Now, we compute the value of the objective function when the vehicle $(l;k)$ needs to wait as the vehicle $(i;j)$ enters the intersection before vehicle $(l;k)$, i.e, $b_{l;j;l;k}[1] = 0$. The rest of the order of $S_{i,j}$ remains the same. Hence, if this is the decision made by the traffic-controller, then the sequence is $S^{\text{new}}(m) = S^{\text{old}}(m)$ for $m \geq n$ where $S^{\text{old}}(n) = (i;j)$, $S^{\text{new}}(n+1) = (i+1;j)$ and $S^{\text{new}}(m) = S^{\text{old}}(m-1)$ for $m > n+1$. The objective value, and the vehicle dynamics are stored. Then, we pick the second element $(l_1;k_1)$. Let the second element be $(l_1;k_1)$. Now we compute the objective value when $b_{l_1;j;l_1;k_1}[2] = 0$. However, $b_{l_1;j;l_1;k_1}[2] = 1$. If this is the optimal sequence chosen by the traffic-controller, then $S^{\text{new}}(m) = S^{\text{old}}(m)$ for $m \geq n+1$ where $S^{\text{old}}(n+1) = (l_1;k_1)$. $S^{\text{new}}(n+2) = (i;j)$ and $S^{\text{new}}(m) = S^{\text{old}}(m)$ for $m > n+2$. We again store the objective values, and the dynamics. If $S_{i,j}(n) = (i^0;j^0)$ for any i^0 , we do not take any action as we are only interested in scheduling of vehicles in the conflicting lanes. We continue this process until we exhaust $S_{i,j}$. We then select the decision which corresponds to the lowest objective value.

We now illustrate the algorithm using an example.

Example 1. Consider Fig. 1. The vehicle v_1 has left the intersection. Let us assume that the current schedule of entering the intersection (S^{old}) be $f_{v_3; v_2; v_4}g$ which means that v_3 would enter the intersection first, then v_2 , and after that v_4 would enter the intersection. The corresponding estimated time to enter the intersection and leaving the intersection ($S_{1; j}$) is computed by the traffic controller from the vehicle dynamics. Now, suppose vehicle v_5 enters the intersection at time t_5 . Since the vehicle v_5 is the only vehicle in the lane, it would move at the speed limit.

v_3 belongs to the lane which is non-conflicting to lane 3. Thus, we do not select the order between v_3 and v_5 as they can enter the intersection without colliding. First according to our notation $v_5 = (1; 3)$, $v_2 = (1; 2)$, $v_4 = (1; 4)$, and $v_3 = (1; 1)$. We, thus, first consider the decision $b_{1;3;1;2} = 0$, i.e., the vehicle v_5 will enter the intersection before the vehicle v_2 since v_2 enters the intersection before v_3 , thus, $b_{1;3;1;4} = 0$. The traffic-controller computes the objective for this decision. Now, we consider the decision $b_{1;3;1;4} = 0$, however, $b_{1;3;1;2} = 1$. We compute the value of the objective. Finally, we consider the decision $b_{1;3;1;4} = 1$, $b_{1;3;1;2} = 1$. Hence, v_5 will enter the intersection at the last position if this decision is implemented. We compute the value of the objective by computing the dynamics of the vehicles.

We see which combination gives the smallest value. That combination is implemented and the optimal sequence is updated. For example, if the decisions $b_{1;3;1;2} = 1$ and $b_{1;3;1;4} = 0$ give the smallest objective value. Then, the optimal sequence is $f_{v_3; v_2; v_5; v_4}g$.

V. GENERALIZATIONS

A. Response time of the HDVs and Amber-light

There may be a non-zero reaction time of the HDVs when they see change in the traffic-light. We can easily accommodate the reaction time when the phase changes from the red to green by modifying our model in the following manner. When the HDV($i; j$) faces green-light after the red-light, the HDV will respond after a reaction time t_{react} . Thus, if the green-light is switched on at time t^g , then for time till $t^g + t_{react}$, the HDV will respond as if it is still facing the red-light, after the time $t^g + t_{react}$, the HDV will then follow the dynamics when it faces the green-light as described in (10). Hence, similar algorithm as described can be used to obtain the optimal sequence.

When the green-light is changed to red-light at a lane, in general, an amber-light is used between the transition. We can accommodate an amber-light duration in the following manner for the HDV. When the vehicle($i; j$) is at most δ -distance away from entering the intersection, we assume that the vehicle will follow its dynamics as if it is facing a green-light and enter the intersection, i.e., it will treat the amber-light as the green-light. On the other hand when the vehicle($i; j$) is at least δ -distance away from the intersection, the vehicle will not enter the intersection and stop similar to the scenario where it is facing the red-light. The distance δ is chosen as the distance that can be traversed before the vehicle can react and then applies the maximum deceleration possible (cf. (10)).

B. Deviation from the nominal values

The HDVs' parameters may not be the same and may not be known to the traffic-controller. We now discuss how our model can accommodate the setting where the parameters of the HDVs' are drawn from a known and bounded distribution. In this case, the optimal sequence is obtained based on the expected values of the parameters. Note that once the sequence is decided, the traffic-controller also decides when to switch on the red or green-light at a lane based on the decision. However, since the parameter values may not coincide with the estimated values, the time at which the red-light and green-light are switched on will depend on the realized values and the decision $b_{i;j;l;k}$.

Note that the traffic-controller provides the exact time when the AV can enter the intersection in the case it becomes the lead-vehicle and faces the red-light. When the parameters of the HDVs are drawn from a distribution, our model can be extended by considering the worst-case scenario. In particular, when the parameters of the HDVs follow a distribution, the time at which a HDV exits an intersection then can be represented by a probability distribution function for a given decision b . The worst-case scenario is then the maximum value $\bar{t}_{l;k}^f$ of the support set of that distribution for a vehicle ($l; k$). The traffic-intersection controller then computes $\bar{t}_{i;j}^g$ if $\bar{t}_{l;k}^f$ and $\bar{t}_{i;j}^g$ are different where $\bar{t}_{i;j}^g$ is computed similar to $\bar{t}_{i;j}^g$ with $\bar{t}_{l;k}^f$ in place of $\bar{t}_{l;k}^f$. $\bar{t}_{l;k}^f$ is the minimum time by which the vehicle($l; k$) would exit the intersection w.p.1. Hence, $\bar{t}_{i;j}^g$ represents the minimum time at which the vehicle ($i; j$); (k) and ($i; j$); (k_1); (k_1) where $k; k_1 \in M_j$ would exit the intersection with probability 1.

The traffic-intersection controller then informs the time t^g the vehicle($i; j$) can enter the intersection which will ensure that AV will not collide with the vehicles at the intersection. Note that as the traffic-controller samples the vehicles' positions and velocities, those values can be updated. This approach is similar to robust optimization approach or Stochastic Optimization. Detailed numerical results are presented in Section VI-B6. Note that in the IDM model, it is easy to generate the worst-case scenario. For example, the maximum possible value of $\bar{t}_{i;j}^g$ (the head-way distance between two vehicles) will correspond to the worst-case scenario. Note that in the similar way, our model can accommodate the stopping of HDVs. One can again we can formulate a distribution of the time at which a HDV will enter and exit the intersection based on the stopping behavior of the HDVs. Further, our model can also be extended to the scenario where the AV's dynamics are also different from the ones

the traffic-controller estimates. As we discussed, the traffic-controller would decide the optimal sequence based on estimated values of the parameters. Developing the complete framework is left for the future.

In the rare scenarios where a vehicle may stop permanently because of a break-down, the vehicle is removed from the sequence order and the order of the rest of the vehicles is maintained as it is. When again the vehicle is again up for running, the vehicle order is updated by treating the vehicle as a new vehicle.

C. Variation of Maximum Speed

Though we have considered in (8) that AV must enter the intersection at the maximum speed when it solves the optimal control problem. We can relax the assumption. For example, if there is a congestion at the neighboring intersection, the traffic controller may want to reduce the speed of the vehicles entering the intersection, then v_m may not be the maximum speed, rather v_m may be the desirable speed decided by the traffic-intersection controller. We, empirically, evaluate the impact of v_m on the results in Section VI-B7.

D. Allowing Turning at the intersection

Our model can be extended to accommodate the scenario where vehicles can turn. We need to partition the set of lanes from where the vehicles can enter the intersection simultaneously, i.e., the set of non-conflicting lanes (for example, lanes 1 and 3 in Fig. 1) depending on the nature of the lanes. We can use the conflict graph notion as described in [28] where the nodes are the lanes and edge exists between two nodes if they are conflicting to each other. A maximal independent set in a conflict graph represents a set of non-conflicting lanes.

The safety constraint will be modified where the vehicles from the conflicting lanes can not enter the intersection while one vehicle is already in the intersection. This also characterizes the decision $D_{i,j;l;k}$ which schedules the vehicles from the conflicting lanes. We can characterize the dynamics of turning vehicles using the model proposed in [28]. Subsequently, the traffic controller can decide the optimal sequence among the vehicles in the conflicting lanes. The detailed characterization has been left for the future.

E. Difference between the optimal solution and solution of the relaxed problem

In this section, we illustrate difference between the optimal schedule and the optimal schedule obtained by solving the relaxed problem as described in (cf.(27)) using an example. Since in order to determine the optimal schedule, one needs to consider every possible combination, we consider a set-up with only 3 vehicles.

Consider a two lane intersection which intersect with each other. In Fig. 1 consider the two lanes only lanes 1 and 2. There 3 vehicles arrive at lane 1 at times 0, 2 and 7-th seconds respectively 3 vehicles arrive at lane 2 at times 1, 4, and 15-th seconds. The length $L = 300m$ and $S = 100m$. Further $v_m = 20m/s$. Hence, it would take 20 seconds to cross the entire intersection at the maximum speed without any traf-

We assume that the third vehicle at lane 1 (i.e., the vehicle which arrives at the 7-th second) is AV and the first vehicle at lane 2 (the vehicle arrives 1-nd second) is the AV. The rest are HDV. We set $\tau_1 = 0$, $\tau_2 = 0:01$, $\tau_3 = 0$, and $\tau_4 = 10$. Thus, the scheduler puts more weight on the objective where the time the last vehicle would exit the intersection. The weights are the first and third objectives are equal. The final time where the last vehicle exits the intersection is at 40-th seconds.

On the other hand the optimal schedule is $f_{V_{1;1}; V_{1;2}; V_{1;3}; V_{2;1}; V_{2;2}; V_{2;3}}$. Thus, first, the vehicles at lane 1 enter the intersection and then the vehicles at lane 2 enter the intersection. Note that the third vehicle at lane 2 is a HDV and enters 3-seconds after $V_{1;3}$. Hence, in the schedule proposed by our algorithm, the vehicle $V_{2;3}$ has to wait for the vehicle $V_{2;2}$ to exit the intersection. The final time at which the last vehicle in this sequence exits the intersection is at 36-th second which is 4-seconds faster compared to the one obtained by our algorithm. Note that in our proposed algorithm, only the scheduling involving the newly entered vehicle and the vehicle at the conflicting lanes are considered without changing the relative order of other vehicles. Thus, when the vehicle $V_{2;3}$ arrives then the optimal schedule between $v_{1;3}$ and $v_{2;3}$ are considered. Specifically, the schedule $f_{V_{1;1}; V_{1;2}; V_{2;1}; V_{2;2}}$ were kept unchanged as the schedule till the time $v_{2;2}$ enters the intersection is kept unchanged. The two possible schedules are considered (i) $f_{V_{1;1}; V_{1;2}; V_{2;1}; V_{2;2}; V_{2;3}; V_{1;3}}$ (corresponding to $D_{2;3;1;3} = 0$) and ii) $f_{V_{1;1}; V_{1;2}; V_{2;1}; V_{2;2}; V_{1;3}; V_{2;3}}$ (corresponding to $D_{2;3;1;3} = 1$). The first combination yields the final time as 40 seconds whereas the second combination yields the final time as 44 seconds. Thus, our proposed algorithm chooses the combination i). However, in the optimal scheduling algorithm all the possible combinations are considered every time a new vehicle arrives. Thus, the schedule is different. However, the increase in final time is not significant yet our proposed algorithm is computationally easy.

VI. NUMERICAL RESULTS

A. Set Up

We consider an intersection with four lanes as depicted in Fig. 1. We assume that $L = 300m$, $S = 100m$, $v_{min} = 0$, and $v_m = 20m/s$. $a_{max} = u_{max} = 10m/s^2$ and $a_{min} = u_{min} = 10m/s^2$ are respectively the maximum and minimum acceleration of any type of vehicle. We also consider $a_h = 2m/s^2$. Recall that a_h is the acceleration when the lead vehicle is HDV and enters the intersection at a speed below the speed limit. The velocity of any vehicle can not exceed v_m . The distance S is enough to attain the highest speed from the zero velocity if the vehicle accelerates uniformly with a_h . We also set $\tau_1 = 1$ for the optimization problem in (27).

When the vehicles follow another vehicle, we also need to set the parameters for the IDM. We assume that $\tau_{ij} = 2:5$ -sec for the HDVs, and $\tau_{ij} = 1:5$ -s for the AVs. We investigate the impact when the τ_{ij} of a HDV varies randomly following a distribution in Section VI-B6 s_0 the safe steady distance between any two vehicles is assumed to be 20m.

For the simulation, we discretize the velocity–

$$\begin{aligned} v_{i,j}(t + \Delta t) - v_{i,j}(t) &= \frac{dv_{i,j}(t)}{dt} \Delta t \\ p_{i,j}(t + \Delta t) - p_{i,j}(t) &= v_{i,j}(t) \Delta t + \\ &\frac{1}{2}(v_{i,j}(t + \Delta t) - v_{i,j}(t))^2 \Delta t \end{aligned} \quad (28)$$

where Δt is the small time for discretization. We set $\Delta t = 0.01$ -sec. We also set $\Delta x = 100$ m which is the largest distance from which a HDV would start decelerating when it encounters a red light. Note that the value of $\frac{dv_{i,j}(t)}{dt}$ is based on whether the vehicle is following another vehicle (IDM model, cf.(13)) or, it is the lead vehicle as in ((11), and (10)). For the AV, the value is either given by (9) or by (13). We also consider that when the traffic-light transitions from red to green a HDV responds after 1-sec.

We consider that the vehicles arrive according to a Poisson process in each lane. The vehicles arrive with mean inter-arrival time of 10 seconds. We run the simulation for 1 hour i.e., 3600 seconds. For each vehicle, with probability (w_{HDV}) we assign it as a HDV and with probability (w_{AV}) we assign it as a AV. We compare our proposed algorithm with the FIFO algorithm where the vehicles which have entered first would cross the intersection first. We take average over 100 simulations. We compare our algorithm with respect to the FIFO algorithm [14]. FIFO algorithm is the following– it ranks the vehicles according the order they arrive at the control zone, thus, the vehicle who enters the control zone first is considered to enter the intersection first. The tie is broken in an arbitrary manner. Note that once the exit sequence is decided, the trajectories are also decided. Hence, the time at which the vehicles enter the intersection are estimated. The AVs are provided with the information at what time they would enter the intersection. The AV then computes its trajectory according to (8).

B. Results

1) Total time: Fig. 2 shows the variation of the time at which the last vehicle would cross the intersection (i.e. case delay, cf.(26)). This would measure the total time taken by all the vehicles to cross the intersection. Note that as the percentage of the AVs increases, t_{final} decreases. Intuitively, as the percentage of the AVs increases the traffic controller can send signals when they can cross the intersection. Since the AVs can optimize the velocity profile accordingly, the total time taken by all the vehicles also reduce.

Fig. 2 also depicts that compared to the FIFO, our algorithm decreases the time significantly. The time reduction is higher when the percentage of the AV vehicles is small. Since in the FIFO, if the number of HDVs is large, the HDVs need to stop and wait for the vehicles in the conflicting lanes to cross before it can cross. The HDV then needs to accelerate and cross the intersection at a slower speed compared to the AV. Hence, the total time taken in the FIFO becomes very large when the percentage of the AVs is small. Thus, our algorithm is most effective when the penetration rate of the AVs is small and our algorithm provides improvement of over 90%. Even when

the percentage of the AVs is 90%, we obtain 50% decrease in the total time taken by the vehicles to cross the intersection.

Recall from the optimization problem in (27) that corresponds to the objective of the total time. Hence, as α increases compared to α_2 and α_3 , our algorithm obtains lower total time taken by all the vehicles to cross the intersection. The total number of vehicles which cross the intersection is significantly higher compared to the FIFO. Hence, our algorithm provides significantly better throughput compared to the FIFO.

2) Distribution of the Delay: Fig. 3 shows the average delay over all vehicles. Recall that the delay t_{ij}^0 (Definition 3). As the percentage of the AVs increases, the delay decreases.

Fig. 3 shows that compared to the FIFO, our algorithm reduces the individual delay by a significant amount. For example, when the AV penetration rate is only 5%, the average delay is around 500 seconds for FIFO whereas in our algorithm, it is only around 120 seconds for $\alpha_2 = 10$ and around 90 seconds when $\alpha_2 = 100$. Even when the AV penetration rate is 90% the average delay in FIFO is around 195 seconds, whereas in our algorithm is merely 5 seconds (close to negligible). Thus, our algorithm reduces the mean delay significantly compared to the FIFO system.

Recall from the optimization problem in (27) that corresponds to the penalty for larger delay. Hence, as α increases compared to α_1 and α_3 , the mean delay also decreases (Fig. 3).

Fig. 4 shows that compared to the FIFO, the maximum delay among all the vehicles is significantly less in our algorithm. Maximum delay or the worst case delay measures the robustness of our algorithm. Note that as the percentage of the AVs increases the maximum delay decreases since the AVs can optimize the dynamics and can follow closely compared to the HDVs. On the other hand, the HDVs stop at the red signal and then again starts when the signal is green which results in greater delay. Fig. 4 depicts that the worst case delay can be in the order of 3600 seconds (i.e., 1 hour) when the AV penetration rate is only 5%. However, still in our algorithm it is of the order of 540 seconds (9 minutes). Fig. 4 reveals

that even when the AV penetration rate is 90%, the worst case delay can be of the order of 1200 seconds (20 minutes), however, in our algorithm, it is of the order of 100 seconds (2 minutes). Thus, our algorithm significantly reduces the worst case delay compared to the FIFO.

Similar to Fig. 3, in Fig. 4, as α_2 increases, the worst case delay decreases. However, the decrement is not very significant.

3) Distribution of the Velocity while entering the Intersection: Fig. 5 depicts the average velocities over the vehicles when they enter the intersection. Recall that the velocity at which the vehicle enters the intersection at large α is given by $v_{i,j}(t_{ij}^m)$. If the traffic controller sends information to the AVs, they can cross the intersection at the maximum speed. Hence, as the percentage of the AVs increases more vehicles cross the intersection at the full speed. Note that the vehicles following the lead vehicle try to maintain the same speed as the lead vehicle. Hence, if the lead vehicle crosses at the fullest speed, the following vehicles also tend to do that which results in higher percentage of vehicles entering the

Fig. 2. The variation of time at which the last vehicle would cross the intersection with the AV penetration rate (i.e. p). $\alpha_2 = 100$; $\alpha_3 = 100$.

intersection at the highest speed. Thus, as the AV penetration rate increases, the average velocity at which the vehicles enter the intersection increases.

Fig. 5 shows that our algorithm ensures better mean velocity compared to the FIFO. The performance of our algorithm is significantly better when the AV penetration rate is small. For example, when the AV penetration is only 5%, the mean velocity in the FIFO is only around 5m/s. However, our algorithm gives mean velocity around 55m/s. As the percentage of the AVs increases, the mean velocity increases in FIFO as well, still the mean velocity is significantly smaller compared to our algorithm. Recall from the optimization problem in (27), α_3 corresponds to the weight regarding the penalty for velocity is not equal to the free speed limit. Hence as α_3 increases the mean velocity increases.

4) Acceleration and Deceleration Fig. 6 depicts that the probability mass functions of the absolute value of change in velocity (or, retardation) over all the vehicles during the one hour window. Our result indicates that as the penetration of the AV increases (i.e. p decreases), the vehicles tend to accelerate or retard less. Hence, the acceleration is more concentrated towards the value 0 when the penetration of the AVs increases. Intuitively, the AVs would optimize its path when it is sent information pertaining when it can enter the intersection. Hence, they can adapt better in terms of changing the velocities.

5) Sensitivity Analysis: Throughout the paper, we consider that the traffic controller predicts the dynamics of the vehicles when a new vehicle enters. In this section, we investigate the scenario where there is an error in prediction regarding the positions of the vehicles. Specifically, we add a random noise with the predicted position of the vehicles. The noise is halved for the AVs. We assume that the random noise is uniformly distributed within the range $[r, r]$. The noise is also tuned in order to maintain a safe distance with the preceding vehicles.

Fig. 7 indicates that even when the traffic controller has a noisy prediction, the performance of the algorithm does not vary much. For example, when the location uncertainty is around 40m, the total travel time only increases by 5 seconds in 3600 seconds window. When the AV penetration rate increases, the impact is even less since the uncertainty pertaining the positions of the AVs are less compared to the HDVs. Further, as the uncertainty increases, the performance degrades, however, the degradation is negligible. Thus, our proposed algorithm can adapt effectively to the uncertainties in estimating the position of the vehicles.

Fig. 3. The variation of the average delay over vehicles with the AV penetration rate (i.e. p).

6) Deviation from the nominal value Note that so far, we assume that the traffic intersection controller knows the parameter values of the HDVs. However, those values may not be known to the traffic intersection controller. Rather, the traffic intersection controller would know the maximum value of the parameter. In the following, we simulate where the parameter T_{ij} is sampled uniformly from a distribution $[r_1, r_2]$.

The traffic intersection controller informs the time to the AV where it is certain that there is no vehicle from the conflicting lanes. Specifically, the traffic intersection controller computes the trajectories, the entry and exit times (eqns. (20)-(23)) by assuming that the head-way for the HDVs is α seconds (the maximum value). Fig. 8 and 9 show that as α increases the delay increases (both the worst-case and the mean value). The increase in delay is also prominent as the percentage of the HDV increases which is expected. Note that when α is high and the penetration of the AV is small, the number of HDVs with a higher head way distance increases, hence, the delay increases significantly.

7) Impact of the values of α_m : We, empirically, show the impact of $v_m = v_{max}$. As v_{max} decreases the delay increases. The rate of increase of delay increases as the maximum velocity v_{max} decreases (Fig. 10).

8) Velocity Profiles of vehicles: In Figs. 11 and 12, we plot the velocity profile of an AV and a HDV when the AV penetration rate is 50%. We choose such vehicles which are impacted with the traffic-light change and show how our algorithm impacts the trajectory of the vehicles depending on whether it is an AV or HDV. We choose the AV such that when it becomes the lead-vehicle it faces a red-light, hence, in our algorithm, the traffic intersection controller informs such an AV when it can enter the intersection. Note from Fig. 11 that such an AV enters the intersection at the maximum speed and maintains that till it exits the intersection.

On the other hand, the traffic intersection controller can not coordinate with the HDV. During a trajectory, the HDV stops twice (Fig. 12). First, when the vehicle it is following stops; second, when the HDV is a lead-vehicle and it faces a red-light. Note that when the traffic-light is again green, it enters the intersection at the velocity unlike the AV. Hence, the HDV accelerates and reaches the maximum velocity before exiting the intersection.

Fig. 4. The variation of the maximum delay of vehicles with the AV penetration rate (i.e. p).

Note that so far, we assume that the traffic intersection controller knows the parameter values of the HDVs. However, those values may not be known to the traffic intersection controller. Rather, the traffic intersection controller would know the maximum value of the parameter. In the following, we simulate where the parameter T_{ij} is sampled uniformly from a distribution $[r_1, r_2]$.

The traffic intersection controller informs the time to the AV where it is certain that there is no vehicle from the conflicting lanes. Specifically, the traffic intersection controller computes the trajectories, the entry and exit times (eqns. (20)-(23)) by assuming that the head-way for the HDVs is α seconds (the maximum value). Fig. 8 and 9 show that as α increases the delay increases (both the worst-case and the mean value). The increase in delay is also prominent as the percentage of the HDV increases which is expected. Note that when α is high and the penetration of the AV is small, the number of HDVs with a higher head way distance increases, hence, the delay increases significantly.

7) Impact of the values of α_m : We, empirically, show the impact of $v_m = v_{max}$. As v_{max} decreases the delay increases. The rate of increase of delay increases as the maximum velocity v_{max} decreases (Fig. 10).

8) Velocity Profiles of vehicles: In Figs. 11 and 12, we plot the velocity profile of an AV and a HDV when the AV penetration rate is 50%. We choose such vehicles which are impacted with the traffic-light change and show how our algorithm impacts the trajectory of the vehicles depending on whether it is an AV or HDV. We choose the AV such that when it becomes the lead-vehicle it faces a red-light, hence, in our algorithm, the traffic intersection controller informs such an AV when it can enter the intersection. Note from Fig. 11 that such an AV enters the intersection at the maximum speed and maintains that till it exits the intersection.

On the other hand, the traffic intersection controller can not coordinate with the HDV. During a trajectory, the HDV stops twice (Fig. 12). First, when the vehicle it is following stops; second, when the HDV is a lead-vehicle and it faces a red-light. Note that when the traffic-light is again green, it enters the intersection at the velocity unlike the AV. Hence, the HDV accelerates and reaches the maximum velocity before exiting the intersection.

C Arrangement of the HDVs and the AVs

In order to analyze the impact of the arrangement of the HDVs and AVs, we simulate the arrivals of the vehicles in the

Fig. 5. The variation of the velocity of vehicles at the value of acceleration or retardation as a function of penetration rate (i.e. p). $\alpha_2 = 100$; $\alpha_4 = 100$.
 Fig. 6. The probability mass function of absolute value of acceleration or retardation as a function of p .
 Fig. 7. The variation of the increase in total travel time as a function of α and p .

Fig. 8. The variation of worst-case delay with respect to r_1 , $T_{ij} \in U [2; r_1]$ for HDVs.
 Fig. 9. The variation of the average delay with respect to r_1 , $T_{ij} \in U [2; r_1]$ for HDVs.
 Fig. 10. The variation of the average delay with respect to v_{max} .

Fig. 11. The variation of the velocity of an AV with time.
 Fig. 12. The variation of the velocity of the HDV with time.

Fig. 13. The variation of the total time taken by the vehicles in 2 different scenarios as a function of k . $\alpha_1 = 100$; $\alpha_2 = 100$; $\alpha_3 = 100$.

following manner. We, first, consider that 50% of all vehicles is AV. We divide the total incoming vehicles in a lane in the batch of k vehicles. We consider that out of k vehicles, first $k/2$ vehicles are AV and the rest $k/2$ vehicles are HDV.

Our result shows that as k increases, the total time the vehicles take to cross the intersection increases (Fig. 13). Intuitively, when the HDVs become the lead vehicles they enter the intersection at a smaller speed compared to the AVs. Since the HDVs arrive later compared to the AVs, it takes more time to cross the intersection.

Fig. 13 also shows that the second combination where first $k/2$ vehicles are HDVs and the rest of the $k/2$ vehicles are AVs gives smaller total time compared to the first scenario.

Further, as k increases the total time taken is also reduced. When the AV becomes the lead vehicle it can approach the intersection with a larger speed and thus, it takes smaller time to cross the intersection. Thus, the traffic controller can intentionally allow the HDV to cross the intersection by withholding the AVs. However, when k increases too much the total time again increases since the HDVs need to be stopped as otherwise it would cause significant wait time to all the vehicles. Thus, the total time taken again increases when k exceeds a threshold.

Fig. 14. The variation of the maximum wait time among the vehicles in 2 different scenarios as a function of k . $\alpha_1 = 100$; $\alpha_2 = 100$; $\alpha_3 = 100$.

Fig. 14 shows the maximum delay among all the vehicles as a function of k . Similar to Fig. 13 Scenario 2 reduces the maximum wait time of the vehicles. However, unlike in Fig. 13, in Fig. 14 the wait time increases as k increases. This is due to the fact that as k increases, the number of HDVs in a slot becomes higher compared to the AVs. Since the HDVs take longer time to cross the intersection, the wait time of the vehicles become large. Hence, for better performance the HDV and AV should alternate.

When Fig. 15 shows the mean velocity of the vehicles when they enter the intersection as a function of k it reveals that

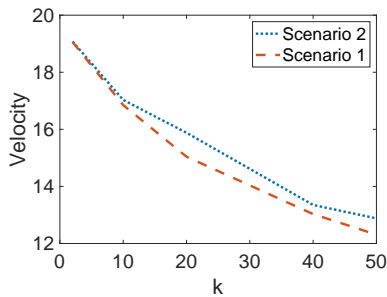


Fig. 15. The variation of the mean velocity of the vehicles in 2 different scenarios as a function of k . $\tau_1 = 100$; $\tau_2 = 100$; $\tau_3 = 100$.

scenario 2 gives slightly better mean velocity compared to the scenario 1. However, unlike in Fig. 13, Fig. 15 reveals that as k increases the mean velocity decreases in both the scenarios. Since when a large number of HDVs arrive in burst without any AV, it would decrease the mean speed. Hence in order to maintain high velocity the HDV and AV should alternate.

Thus, the arrangement of the HDVs and AVs can play a significant role in the total time taken by the vehicles, the average velocity, and the maximum delay among the vehicles. Scenario 2 where the AVs would follow the HDV would give a lower total time for crossing across the vehicles. However, there exists an optimal threshold for the size of the AVs to follow the HDV. On the other hand, when AV and HDV alternate the average velocity at which the vehicles enter is the maximum. The combination where the AV and HDV alternates also results in smaller delay across the vehicles.

VII. CONCLUSIONS AND FUTURE WORK

We consider a scenario where the traffic controller optimally decides the sequence at which vehicles enter an urban intersection in a mixed autonomy scenario. When a new vehicle enters the system, the traffic-controller computes the optimal sequence. Since the number of possible combinations increases exponentially with the number of vehicles, we consider a relaxed version where the sequence is computed only among the newly entered vehicle and the vehicles at the conflicting lanes with the relative order of vehicles among the others are kept the same. Thus, the possible combination scales only linearly with the number of vehicles. We formulate the optimization problem and proposes an algorithm which gives the optimal solution to the problem. We consider that the traffic-intersection controller can inform the AV the time at which it can enter the intersection if it enters as the lead vehicle or it will face a red-light once the preceding vehicle enters the intersection. Such an AV can enter the intersection at the maximum speed while adapting its dynamics. We characterize how the traffic-intersection controller selects the traffic-lights at each lane based on a scheduling order, and how such a decision impacts the dynamics of the vehicles. We also show that how our work can be extended when the HDV's parameters may deviate from the nominal values. We empirically evaluate our algorithm and show that our algorithm significantly outperforms the FIFO mechanism.

Our work can be extended in numerous ways. We have considered only one intersection zone. The characterization of optimal algorithm considering multiple intersections and the

traffic behavior across multiple intersections is another possible future research direction. Further, though, we empirically characterize the impact of the uncertainties in the predicting the position on the model, the complete theoretical analysis is left for the future. The characterization on other vehicle following models have been left for the future. Finally, more sophisticated model for fuel cost has also left for the future.

REFERENCES

- [1] K. Dresner and P. Stone, "Multiagent traffic management: a reservation-based intersection control mechanism," in *Proceedings of the Third International Joint Conference on Autonomous Agents and Multiagent Systems, 2004. AAMAS 2004.*, 2004, pp. 530–537.
- [2] L. Li and F. Wang, "Cooperative driving at blind crossings using inter-vehicle communication," *IEEE Transactions on Vehicular Technology*, vol. 55, no. 6, pp. 1712–1724, 2006.
- [3] F. Yan, M. Dridi, and A. El Moudni, "Autonomous vehicle sequencing algorithm at isolated intersections," in *2009 12th International IEEE Conference on Intelligent Transportation Systems*, 2009, pp. 1–6.
- [4] F. Zhu and S. V. Ukkusuri, "A linear programming formulation for autonomous intersection control within a dynamic traffic assignment and connected vehicle environment," *Transportation Research Part C: Emerging Technologies*, vol. 55, pp. 363 – 378, 2015, engineering and Applied Sciences Optimization (OPT-i) - Professor Matthew G. Karlaftis Memorial Issue.
- [5] D. Miculescu and S. Karaman, "Polling-systems-based control of high-performance provably-safe autonomous intersections," in *53rd IEEE Conference on Decision and Control*, 2014, pp. 1417–1423.
- [6] E. G. Gilbert, "Vehicle cruise: Improved fuel economy by periodic control," *Automatica*, vol. 12, no. 2, pp. 159 – 166, 1976.
- [7] J. Hooker, "Optimal driving for single-vehicle fuel economy," *Transportation Research Part A: General*, vol. 22, no. 3, pp. 183 – 201, 1988.
- [8] M. W. Levin and D. Rey, "Conflict-point formulation of intersection control for autonomous vehicles," *Transportation Research Part C: Emerging Technologies*, vol. 85, pp. 528 – 547, 2017.
- [9] S. A. Fayazi, A. Vahidi, and A. Luckow, "Optimal scheduling of autonomous vehicle arrivals at intelligent intersections via milp," in *2017 American Control Conference (ACC)*, 2017, pp. 4920–4925.
- [10] Q. Lu and K. Kim, "A mixed integer programming approach for autonomous and connected intersection crossing traffic control," in *2018 IEEE 88th Vehicular Technology Conference (VTC-Fall)*, 2018, pp. 1–6.
- [11] C. Yu, Y. Feng, H. X. Liu, W. Ma, and X. Yang, "Integrated optimization of traffic signals and vehicle trajectories at isolated urban intersections," *Transportation Research Part B: Methodological*, vol. 112, pp. 89–112, 2018.
- [12] I. Ioslovich, P.-O. Gutman, and M. Borshchevsky, "Time-optimal traffic control synthesis for a signalized isolated intersection," in *2011 9th IEEE International Conference on Control and Automation (ICCA)*. IEEE, 2011, pp. 423–428.
- [13] J. Rios-Torres and A. A. Malikopoulos, "A survey on the coordination of connected and automated vehicles at intersections and merging at highway on-ramps," *IEEE Transactions on Intelligent Transportation Systems*, vol. 18, no. 5, pp. 1066–1077, 2017.
- [14] Y. J. Zhang, A. A. Malikopoulos, and C. G. Cassandras, "Optimal control and coordination of connected and automated vehicles at urban traffic intersections," in *2016 American Control Conference (ACC)*, 2016, pp. 6227–6232.
- [15] A. A. Malikopoulos, C. G. Cassandras, and Y. J. Zhang, "A decentralized energy-optimal control framework for connected automated vehicles at signal-free intersections," *Automatica*, vol. 93, pp. 244 – 256, 2018.
- [16] Y. Zhang and C. G. Cassandras, "A decentralized optimal control framework for connected automated vehicles at urban intersections with dynamic resequencing," in *2018 IEEE Conference on Decision and Control (CDC)*, 2018, pp. 217–222.
- [17] I. H. Zohdy, R. K. Kamalanathsharma, and H. Rakha, "Intersection management for autonomous vehicles using icacc," in *2012 15th International IEEE Conference on Intelligent Transportation Systems*, 2012, pp. 1109–1114.
- [18] Z. Zhang, F. Liu, B. Wolshon, and Y. Sheng, "Virtual traffic signals: Safe, rapid, efficient and autonomous driving without traffic control," *IEEE Transactions on Intelligent Transportation Systems*, 2020.

